

我们以建筑为画板

以光为颜料

以我们的创意

理念和灵魂为画笔

为我们的客户描绘出美妙

的光的画卷

我们关注光与被照物之间

的体量和空间


的体系

我们视光为人与环境之间
的一种传播媒介
我们重视建筑的视觉传达
我们更致力于建筑视觉动
力上的开发




**WE TAKE THE BUILDING AS A
DRAWING BOARD,
WITH LIGHT AS A PIGMENT,
WITH OUR IDEAS,
THE IDEA AND THE SOUL ARE
THE BRUSHES,
A BEAUTIFUL PICTURE OF
LIGHT IS PAINTED FOR OUR
CUSTOMERS.
WE ARE CONCERNED WITH
THE BODY MASS RELATIONSHIP
BETWEEN LIGHT AND**

**ILLUMINATED.
OUR VISION AS A
COMMUNICATION MEDIA
BETWEEN PEOPLE AND THE
ENVIRONMENT,
WE ATTACH GREAT
IMPORTANCE TO THE VISUAL
COMMUNICATION OF THE
BUILDING, AND WE ARE
MORE COMMITTED TO THE
DEVELOPMENT OF THE VISUAL
POWER OF THE BUILDING.**

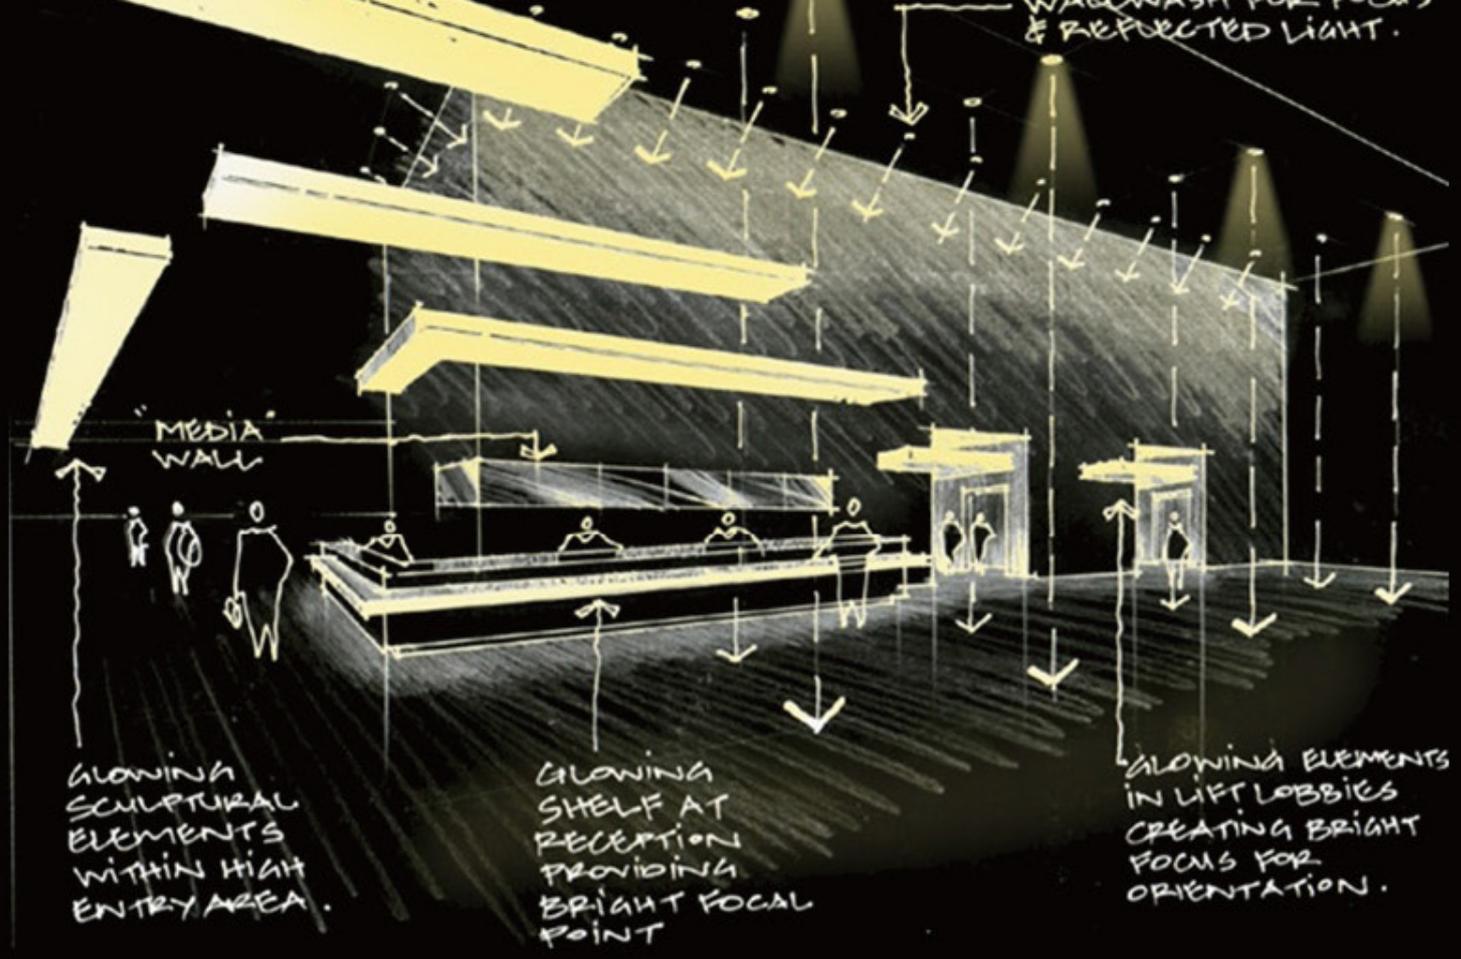

INNOVATION IDEA

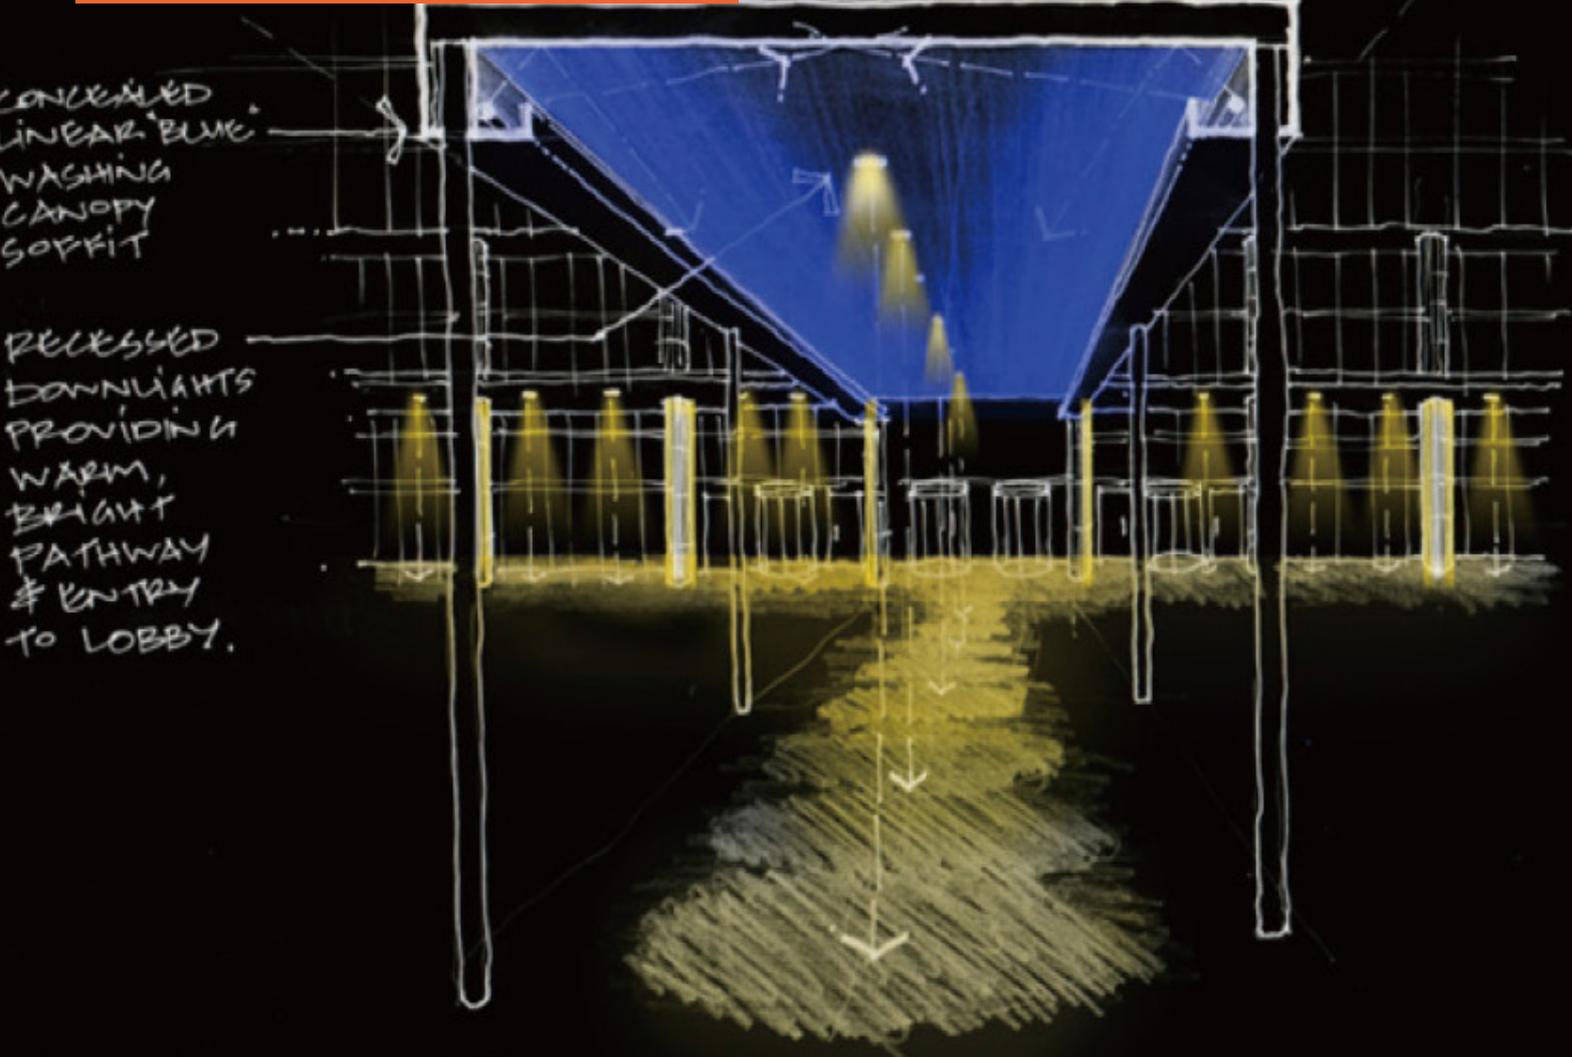

**MANAGE-
MENT
IDEA
共享定制**

**We take the building as a drawing board,
With light as a pigment,
With our ideas,
The idea and the soul are the brushes,
A beautiful picture of light is painted for
our customers.**

**We are concerned with the body mass
relationship between light and illuminated.
Our vision as a communication media
between people and the environment,
We attach great importance to the visual
communication of the building, and we are
more committed to the development of
the visual power of the building.**

我们以建筑为画板，
以光为颜料，
以我们的创意，
理念和灵魂为画笔，
为我们的客户描绘出美妙的光的画卷。

我们关注光与被照物之间的体量关系，
我们视光为人与环境之间的
一种传播媒介，
我们重视建筑的视觉传达，我们更致力于
建筑视觉动力上的开发。

R&D design team have both senior designer, fashion and operation, the senior designers team rationally consider user needs, find out the most feasible design and production plan, strictly control every link of manufacturing, manufacturing and transportation, and strive for the ultimate pursuit of lighting quality and the perfect presentation of final effect.

Focus and to share the custom, optimal integration of industry value platform as the goal, to the position of the user to solve user problems for the purpose of the service, according to the quality, safety and environmental protection three certification system establishment of efficient and convenient service center, design center, R & D and manufacturing center service system to increase the value-added service ability.

The fair competition mechanism, the establishment of high quality and efficient team, for all employees to create a platform for talent and ambition, to achieve personal value, and win-win development.

COMPANY PROFILE

资深设计师团队从功能、时尚、运营的不同视野理性考量用户需求，找出最可行的设计制作方案，严控生产制造运输等每一个环节，致力于对灯光品质的极致追求和最终效果的完美呈现。

专注并坚守共享定制、整合行业最优价值平台为目标，以用户的立场解决用户问题为服务宗旨，按照质量、安全、环保三个认证体系建立高效便捷的服务中心、设计中心、研发制造中心等服务体系增加增值服务能力。

公平竞争机制，建立高质高效的团队，为所有员工创造施展才华和抱负的平台，实现个人价值，共赢发展。

Phoenix 凤舞

16-57



Nine 九耀

60-103



Sky 天际

106-159






DIRECTORY





Phoenix 凤舞

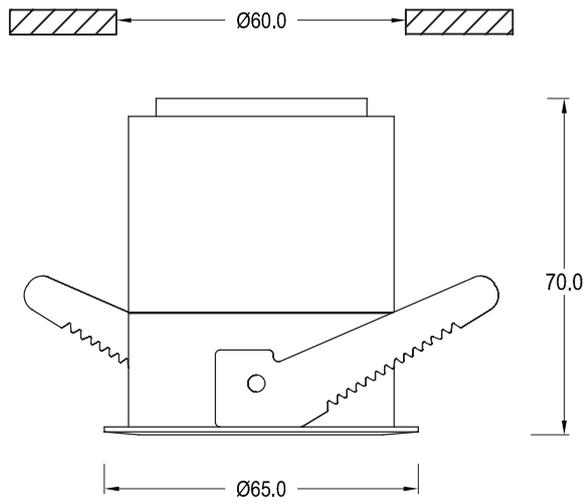

型号
JDF8021

功率
5W / 7W

灯体颜色
白色 / 黑色

外观尺寸
Ø 65*70mm
开孔尺寸
Ø 60mm


光束角
15° 30° 45°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




5W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	702	1391	43.29
2.0	176	348	86.58
3.0	78	155	129.17
4.0	44	87	172.16




7W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	913	1951	47.17
2.0	229	486	94.02
3.0	105	230	141.25
4.0	56	117	188.03




5W 30°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	601	1259	49.32
2.0	150	315	97.25
3.0	67	140	146.56
4.0	38	79	195.62




7W 30°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	901	1872	48.23
2.0	225	469	97.26
3.0	100	208	145.33
4.0	57	120	194.96




5W 45°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	326	782	69.15
2.0	81	195	138.23
3.0	36	87	207.52
4.0	20	49	276.68




7W 45°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	464	1131	71.05
2.0	116	283	142.36
3.0	52	126	214.25
4.0	29	71	285.66



15°




30°




45°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

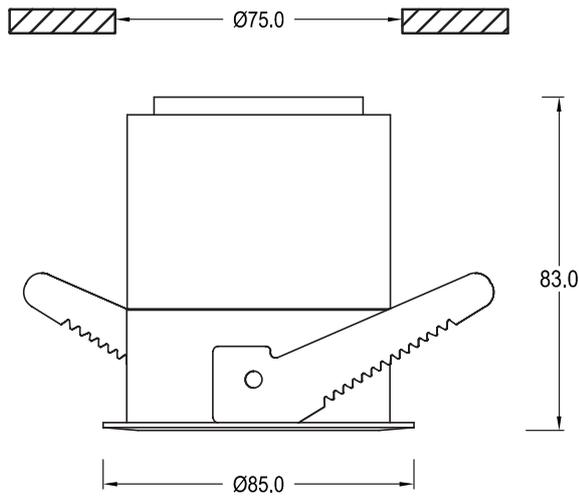

型号
JDF8022


功率
10W / 12W

灯体颜色
白色 / 黑色

外观尺寸
Ø85*83mm
开孔尺寸
Ø75mm


光束角
15° 30° 45°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




10W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1656	2560	35.95
2.0	414	640	71.91
3.0	184	284	107.86
4.0	104	160	143.82




12W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2946	1591	37
2.0	737	398	74
3.0	327	177	111
4.0	184	99	147




10W 30°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1576	2545	36.60
2.0	394	636	73.21
3.0	175	283	109.81
4.0	98	159	146.41




12W 30°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1971	884	57
2.0	493	221	141
3.0	219	98	172
4.0	123	55	229




10W 45°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1132	1681	56.17
2.0	283	420	112.34
3.0	126	189	168.51
4.0	71	105	224.68




12W 45°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1170	440	95
2.0	293	110	190
3.0	130	49	285
4.0	73	28	381



15°




30°




45°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

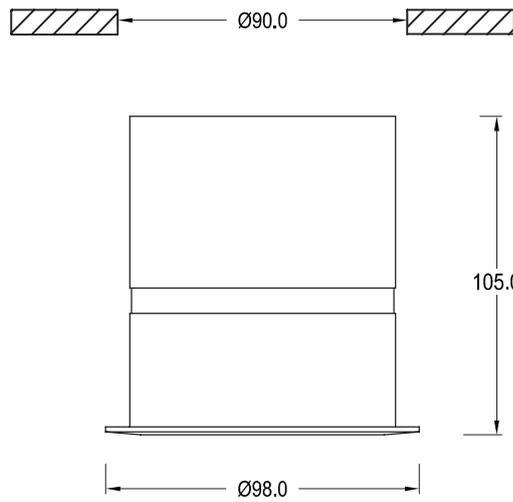

型号
JDF8025


功率
15W / 18W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 98 * 105 \text{mm}$
开孔尺寸
 $\varnothing 90 \text{mm}$


光束角
 $12^\circ \quad 24^\circ$

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




15W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2724	4082	46.29
2.0	681	1021	92.58
3.0	303	454	138.87
4.0	170	255	185.16



18W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3122	4070	46.42
2.0	781	1168	92.84
3.0	347	519	139.26
4.0	195	292	185.68




12°




24°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

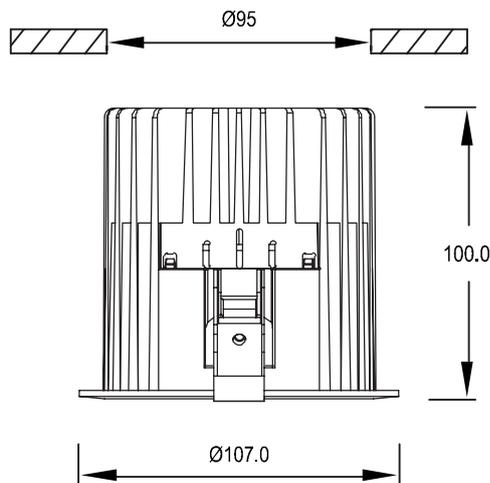

型号
JDF8053


功率
12W / 15W / 18W / 25W

灯体颜色
白色 / 黑色 / 灰色

外观尺寸
Ø107*100mm
开孔尺寸
Ø95mm


光束角
15° 24° 38° 60°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




12W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4413	6433	27.42
2.0	1103	1608	54.83
3.0	490	715	82.25
4.0	275	402	109.67




15W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5749	8359	27.44
2.0	1437	2090	54.87
3.0	639	929	82.31
4.0	359	522	109.74




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2069	2965	45.67
2.0	517	741	91.33
3.0	230	330	137.00
4.0	129	185	182.67




15W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2702	3852	45.74
2.0	675	963	91.48
3.0	300	428	137.22
4.0	169	241	182.96




12W 38°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	954	1471	82.23
2.0	239	368	164.45
3.0	106	163	246.68
4.0	60	92	328.90




15W 38°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1236	1912	81.98
2.0	309	479	163.96
3.0	137	213	245.94
4.0	77	120	327.92




12W 60°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	640	971	112.23
2.0	160	243	224.46
3.0	71	108	336.69
4.0	40	61	448.92



15W 60°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	824	1250	112.28
2.0	206	312	224.55
3.0	92	139	336.83
4.0	52	78	449.11



15°



24°




38°




60°


色温可选



2700K




3000K




4000K

配光曲线图 (3000K)




18W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6425	9323	27.44
2.0	1606	2331	54.87
3.0	714	1036	82.31
4.0	402	583	109.74




25W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7984	11552	27.52
2.0	1996	2888	55.05
3.0	887	1284	82.57
4.0	499	722	110.10




18W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2999	4279	45.70
2.0	750	1070	91.41
3.0	333	475	137.11
4.0	188	267	182.81




25W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3768	5396	45.76
2.0	942	1349	91.52
3.0	419	600	137.27
4.0	234	337	183.03




18W 38°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1374	2126	82.04
2.0	343	531	164.08
3.0	153	236	246.13
4.0	86	133	328.17




25W 38°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1703	2639	82.00
2.0	425	660	164.00
3.0	189	293	246.00
4.0	107	165	328.01




18W 60°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	917	1385	112.30
2.0	229	346	224.60
3.0	102	154	336.90
4.0	57	87	449.20




25W 60°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	969	1754	112.25
2.0	242	438	224.51
3.0	108	195	336.76
4.0	61	110	449.02

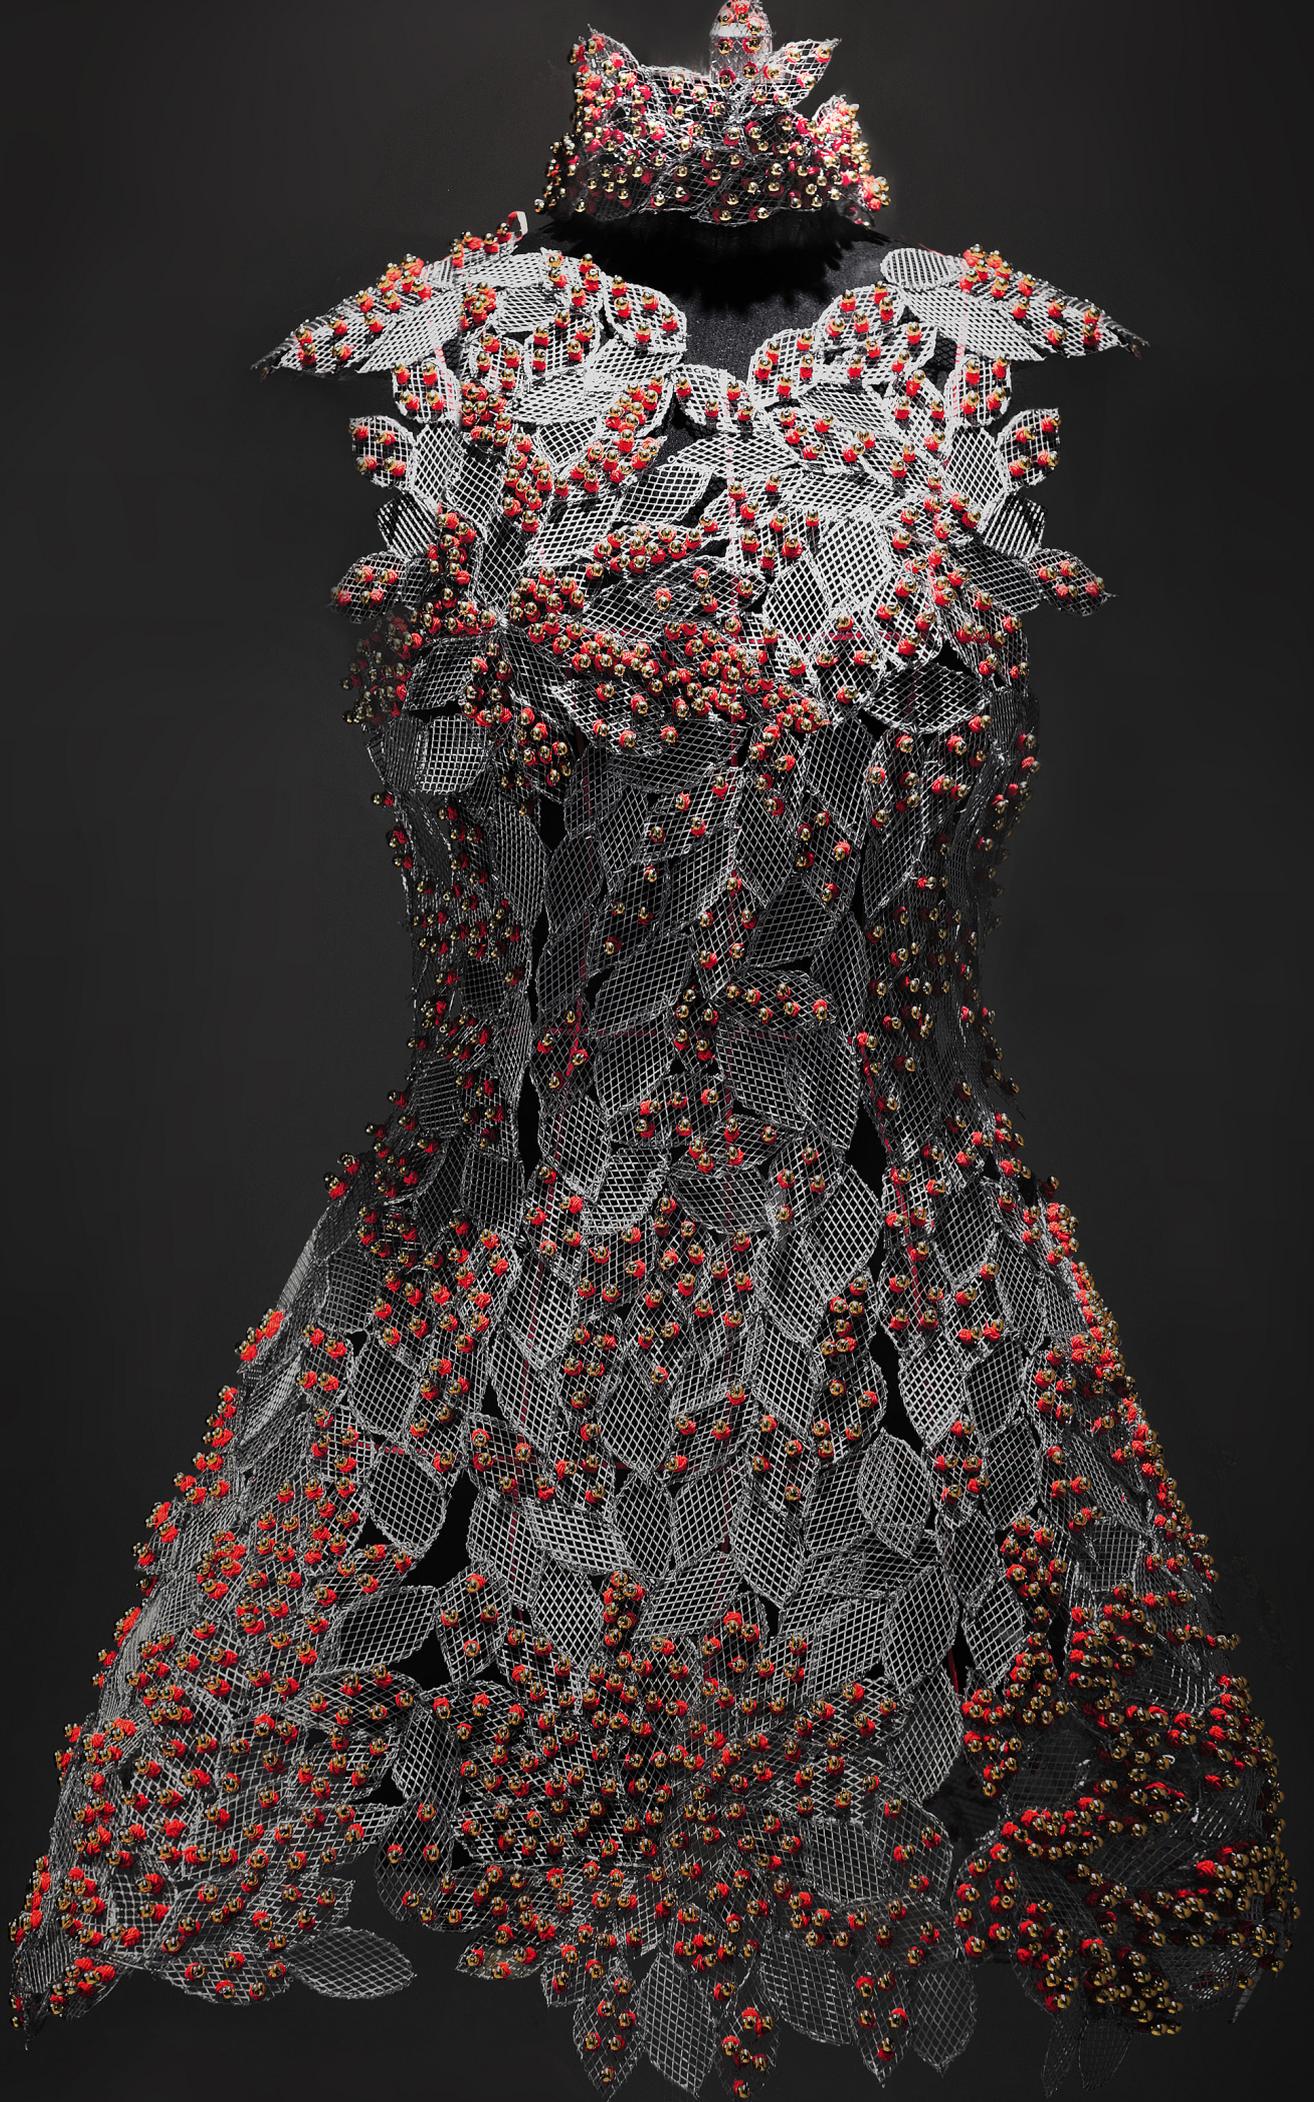

Phoenix 凤舞

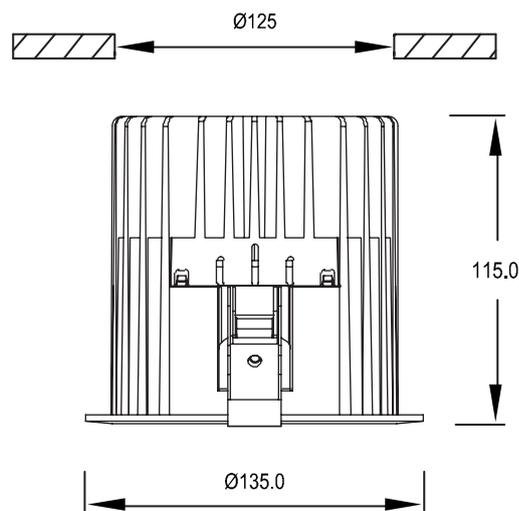

型号
JDF8054


功率
25W / 30W / 35W

灯体颜色
白色 / 黑色 / 灰色

外观尺寸
 $\varnothing 135 \times 115 \text{mm}$
开孔尺寸
 $\varnothing 125 \text{mm}$


光束角
15° 24° 38° 60°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7978	11246	37.43
2.0	1994	2811	74.87
3.0	886	1250	112.30
4.0	499	703	149.74

25W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5826	8335	43.27
2.0	1456	2084	86.53
3.0	647	926	129.80
4.0	364	521	137.07

25W 24°



H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2530	3841	76.31
2.0	632	960	152.61
3.0	281	427	228.92
4.0	158	240	305.23

25W 38°



H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1520	2256	113.57
2.0	380	564	227.13
3.0	169	250	340.70
4.0	95	141	454.26

25W 60°



15°



24°




38°




60°


色温可选



2700K




3000K




4000K

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	8647	12154	37.47
2.0	2162	3039	74.94
3.0	861	1350	112.41
4.0	540	760	149.88

30W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	10507	14824	37.43
2.0	2627	3706	74.87
3.0	1167	1647	112.30
4.0	657	927	149.74

35W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6449	9228	43.30
2.0	1612	2307	86.61
3.0	717	1025	129.91
4.0	403	577	173.21

30W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7753	11145	43.28
2.0	1938	2786	86.57
3.0	862	1238	129.85
4.0	485	697	173.14

35W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2836	4312	76.13
2.0	709	1078	152.25
3.0	315	479	228.38
4.0	177	270	304.51

30W 38°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3391	510561	76.05
2.0	848	1290	152.09
3.0	377	573	228.14
4.0	212	322	304.19

35W 38°



H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1700	2522	113.59
2.0	425	631	227.18
3.0	189	280	340.77
4.0	106	158	454.35

30W 60°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2033	3026	113.59
2.0	508	757	227.18
3.0	226	336	340.77
4.0	127	189	454.35

35W 60°



Phoenix 凤舞

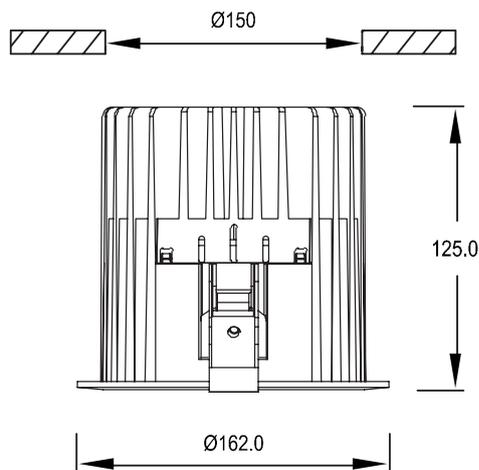

型号
JDF8055


功率
40W / 45W

灯体颜色
白色 / 黑色 / 灰色

外观尺寸
Ø162*125mm
开孔尺寸
Ø150mm


光束角
15° 24° 38° 60°

输入电压
AC 100-265V 50/60Hz

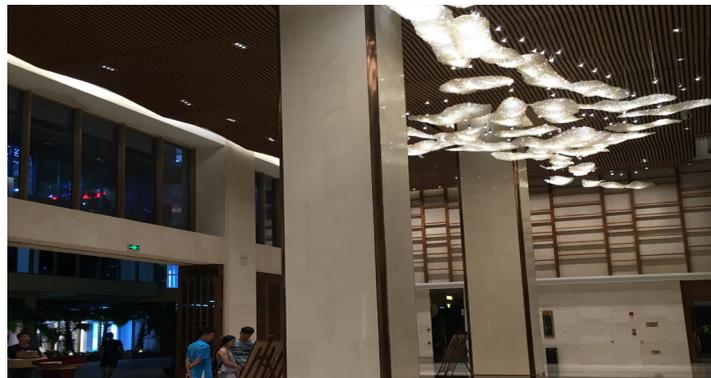





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	9800	14270	40.37
2.0	2450	3568	80.74
3.0	1089	1586	121.11
4.0	612	892	161.48

40W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	10690	15546	40.46
2.0	2672	3886	80.92
3.0	1188	1727	121.38
4.0	668	971	161.84

45W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	8133	12131	43.01
2.0	2033	3033	86.02
3.0	904	1348	129.03
4.0	508	758	172.04

40W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	8879	13221	43.10
2.0	2220	3305	86.20
3.0	987	1469	129.31
4.0	555	826	172.41

45W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4531	7695	62.84
2.0	1133	1924	125.68
3.0	503	855	188.52
4.0	283	481	251.36

40W 38°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4822	8138	63.46
2.0	1205	2053	126.91
3.0	534	904	190.37
4.0	301	509	253.82

45W 38°



H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2453	3915	107.93
2.0	613	979	215.87
3.0	272	435	323.80
4.0	153	245	431.73

40W 60°



H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2685	4296	108.00
2.0	671	1074	216.00
3.0	298	477	324.00
4.0	169	268	432.01

45W 60°




15°



24°




38°




60°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

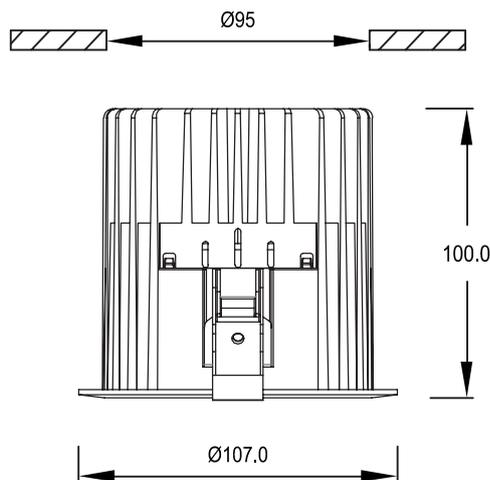

型号
JDF8063


功率
18W / 25W

灯体颜色
白色 / 黑色 / 灰色

外观尺寸
Ø107*100mm
开孔尺寸
Ø95mm


光束角
偏光

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学玻璃
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




18W

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	352	713	149.09
2.0	88	178	298.18
3.0	39	79	447.27
4.0	22	45	596.37




25W


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	433	879	148.55
2.0	108	220	297.10
3.0	48	98	445.65
4.0	27	55	594.20

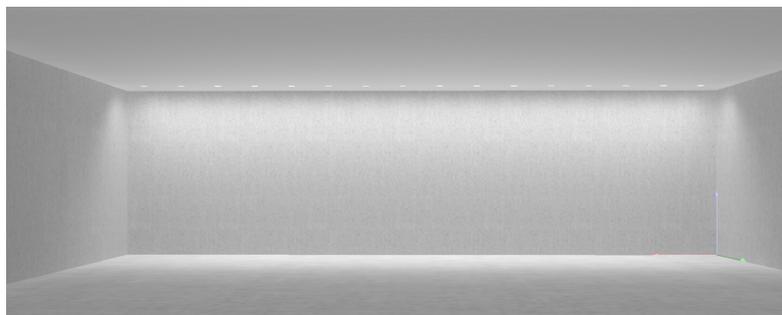


色温可选



2700K




3000K



4000K

Phoenix 凤舞

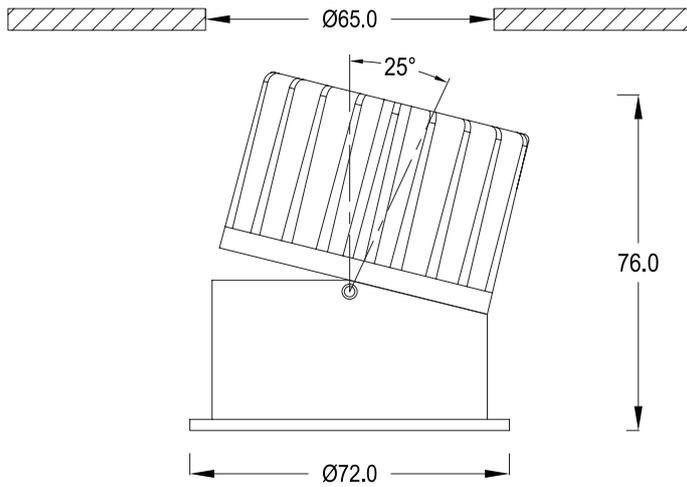

型号
JDF8082


功率
7W / 10W

灯体颜色
白色 / 黑色

外观尺寸
Ø72*76mm
开孔尺寸
Ø65mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1049	1494	45.45
2.0	262	373	90.89
3.0	117	166	136.34
4.0	66	93	181.78

7W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1185	1676	45.70
2.0	296	419	91.41
3.0	132	186	137.11
4.0	74	105	182.81

10W 24°



15°




24°




36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

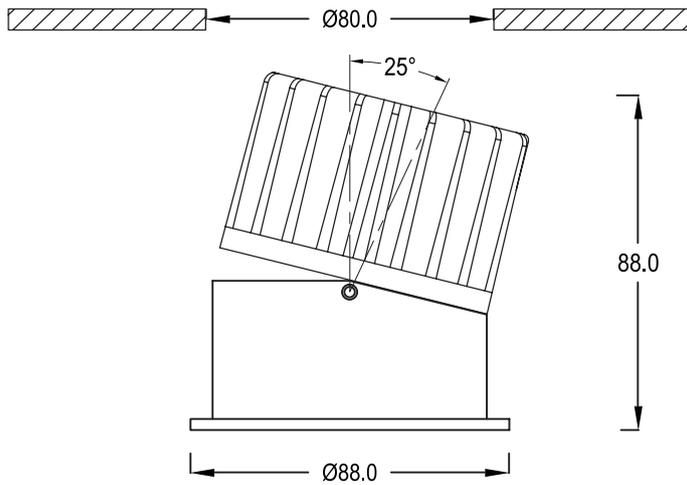

型号
JDF8083



功率
12W / 15W / 18W

灯体颜色
白色 / 黑色

外观尺寸
Ø88*88mm
开孔尺寸
Ø80mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz

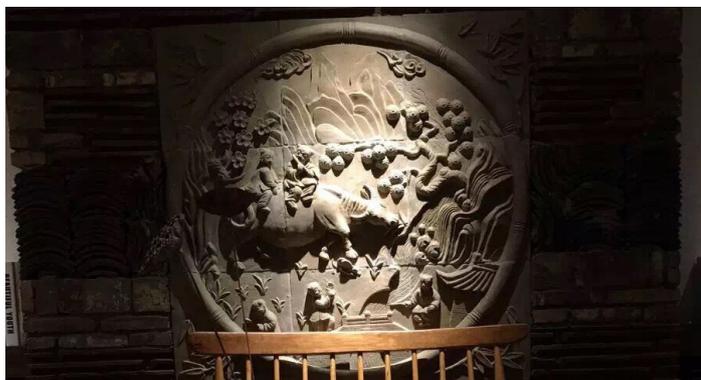





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2467	3438	42.17
2.0	617	860	84.34
3.0	274	382	126.51
4.0	154	215	168.68



15W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3095	4303	42.32
2.0	774	1076	84.63
3.0	344	478	126.95
4.0	193	269	169.27




18W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3379	4705	42.41
2.0	845	1176	84.82
3.0	375	523	127.22
4.0	211	294	169.63



15°




24°

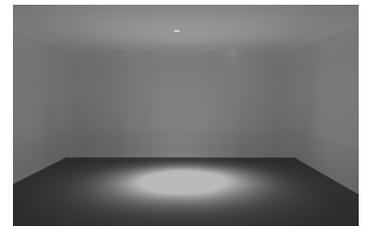


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

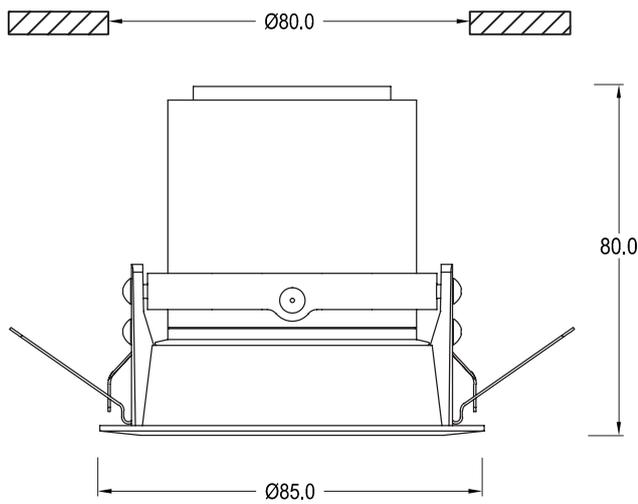

型号
JDF8041


功率
7W / 10W

灯体颜色
白色 / 黑色

外观尺寸
Ø85*80mm
开孔尺寸
Ø80mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz

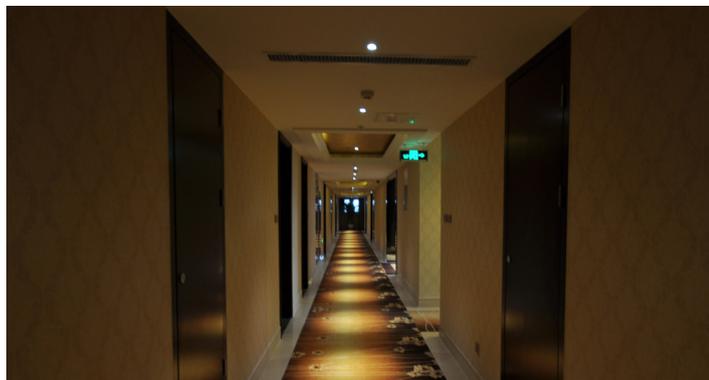





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




7W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4675	6934	22.81
2.0	1169	1734	45.61
3.0	519	770	68.42
4.0	292	433	91.23




10W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5435	8058	22.75
2.0	1359	2015	45.51
3.0	604	895	68.26
4.0	340	504	91.02




7W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1615	2275	45.46
2.0	404	569	90.93
3.0	176	253	136.39
4.0	101	142	181.86




10W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1865	2616	45.54
2.0	466	653	91.08
3.0	207	291	136.61
4.0	117	164	182.15



7W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	915	1388	60.17
2.0	229	347	120.33
3.0	102	154	180.50
4.0	57	86	240.66




10W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1054	1596	60.24
2.0	264	399	120.48
3.0	117	177	180.73
4.0	66	100	240.97



12°




24°

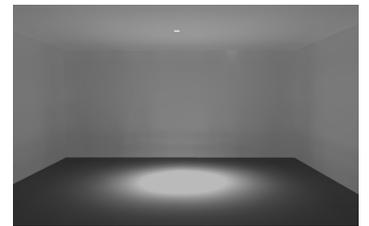


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

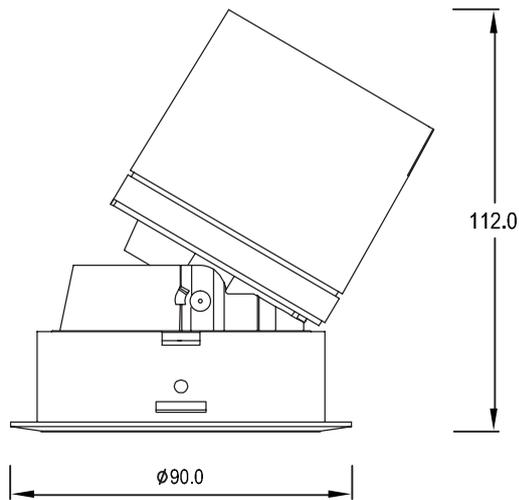

型号
JDF8011


功率
7W / 12W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 90 * 112\text{mm}$
开孔尺寸
 $\phi 80\text{mm}$


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4443	6663	22.45
2.0	1111	1666	44.91
3.0	474	740	67.36
4.0	278	416	89.81

7W 12°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6181	9268	22.49
2.0	1545	2317	44.98
3.0	686	1030	67.47
4.0	386	579	89.95

12W 12°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1281	1979	44.35
2.0	320	494	88.69
3.0	142	220	133.04
4.0	80	123	177.38

7W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1816	2788	44.69
2.0	454	697	89.39
3.0	201	310	134.08
4.0	113	174	178.78

12W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	842	1251	59.90
2.0	810	312	119.80
3.0	93	139	179.70
4.0	52	78	239.60

7W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1179	1752	59.86
2.0	295	438	119.72
3.0	131	194	179.58
4.0	74	110	239.44


12W 36°



12°




24°

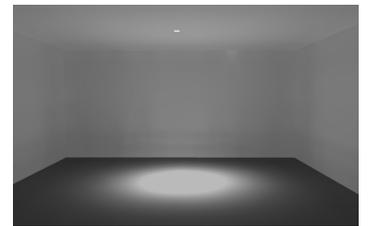


36°

色温可选



2700K




3000K



4000K

Phoenix 凤舞

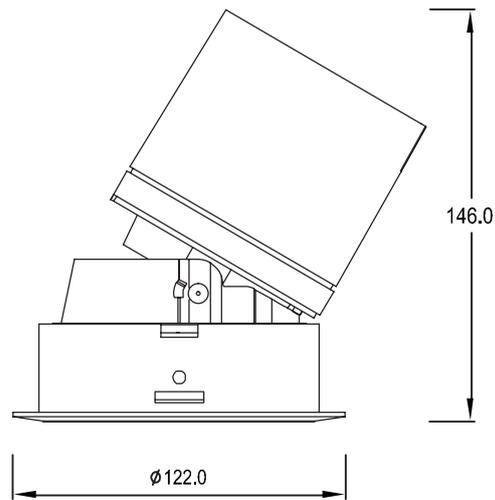

型号
JDF8012


功率
18W / 24W / 28W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 122 \times 146 \text{mm}$
开孔尺寸
 $\varnothing 105 \text{mm}$


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz






灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




18W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5022	7051	34.07
2.0	1256	1763	68.13
3.0	558	783	102.20
4.0	314	440	136.26




18W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3627	5301	44.72
2.0	907	1325	87.45
3.0	403	589	131.17
4.0	227	331	174.89




24W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6568	9205	34.12
2.0	1642	2301	68.24
3.0	730	1023	102.36
4.0	410	575	136.48




24W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4745	6914	43.83
2.0	1186	1728	87.67
3.0	527	768	131.50
4.0	297	432	175.33




28W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7143	10008	34.14
2.0	1786	2502	68.27
3.0	793	1112	102.41
4.0	446	625	136.55




28W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5342	7821	43.78
2.0	1335	1955	87.56
3.0	594	869	131.33
4.0	334	489	175.11



15°




24°

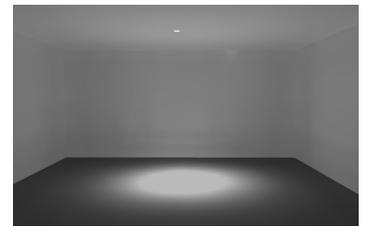


36°

色温可选



2700K




3000K



4000K

Phoenix 凤舞

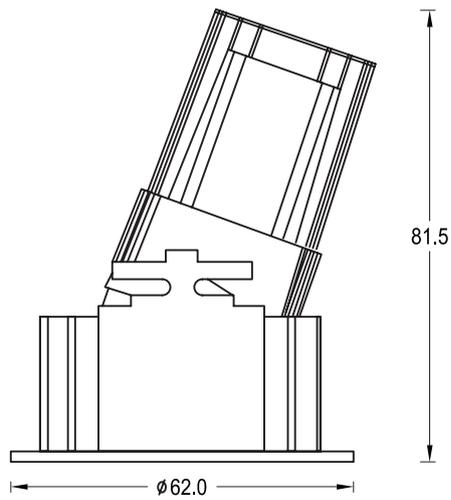

型号
JDF8042-W


功率
5W / 7W


灯体颜色
白色 / 黑色

外观尺寸
Φ62*81.5mm
开孔尺寸
Φ55mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	332	487	41.66
2.0	83	122	83.32
3.0	37	54	124.98
4.0	21	30	166.64

5W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	580	849	41.61
2.0	145	212	83.21
3.0	64	94	124.82
4.0	36	53	166.42

7W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	140	229	67.77
2.0	35	57	135.53
3.0	16	25	203.30
4.0	9	14	271.07

5W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	236	417	69.09
2.0	59	104	138.19
3.0	26	46	207.28
4.0	15	26	276.37


7W 36°



15°




24°

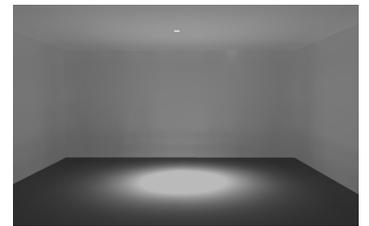


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

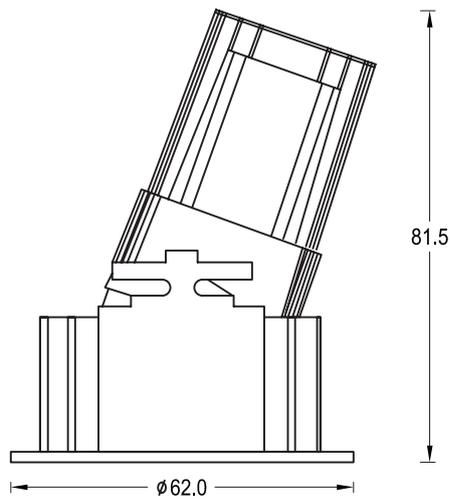

型号
JDF8042-Y


功率
5W / 7W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 62 \times 81.5 \text{mm}$
开孔尺寸
 $\phi 55 \text{mm}$


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	332	487	41.66
2.0	83	122	83.32
3.0	37	54	124.98
4.0	21	30	166.64

5W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	580	849	41.61
2.0	145	212	83.21
3.0	64	94	124.82
4.0	36	53	166.42

7W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	140	229	67.77
2.0	35	57	135.53
3.0	16	25	203.30
4.0	9	14	271.07

5W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	236	417	69.09
2.0	59	104	138.19
3.0	26	46	207.28
4.0	15	26	276.37

7W 36°



15°




24°




36°

色温可选



2700K




3000K



4000K

Phoenix 凤舞

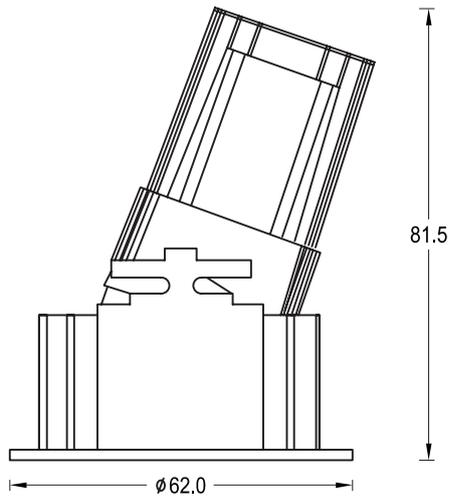

型号
JDF8042-T



功率
5W / 7W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 62 \times 81.5$ mm
开孔尺寸
 $\phi 55$ mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz

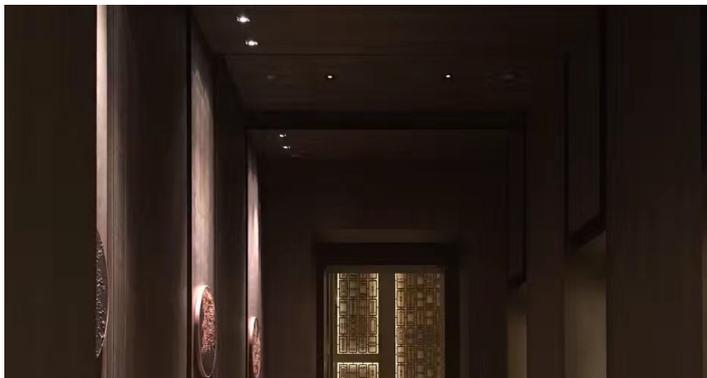





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	332	487	41.66
2.0	83	122	83.32
3.0	37	54	124.98
4.0	21	30	166.64

5W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	580	849	41.61
2.0	145	212	83.21
3.0	64	94	124.82
4.0	36	53	166.42

7W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	140	229	67.77
2.0	35	57	135.53
3.0	16	25	203.30
4.0	9	14	271.07

5W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	236	417	69.09
2.0	59	104	138.19
3.0	26	46	207.28
4.0	15	26	276.37


7W 36°



15°




24°

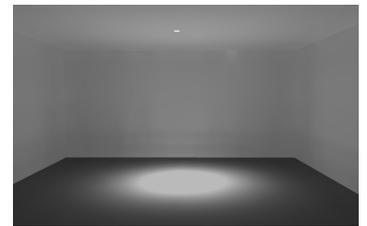


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

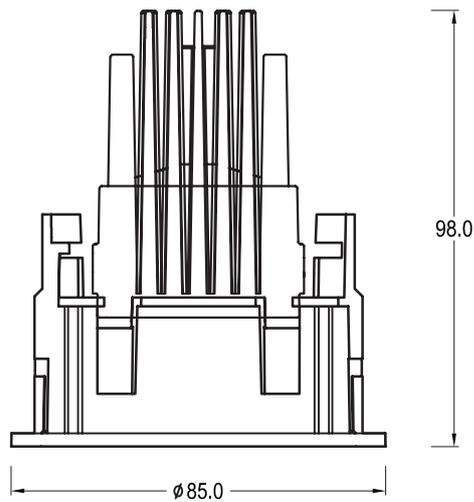

型号
JDF8043-W


功率
10W / 12W / 15W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 85 \times 98$ mm
开孔尺寸
 $\phi 75$ mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1293	1981	39.21
2.0	322	495	78.42
3.0	144	220	117.62
4.0	81	124	156.83

10W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	868	1313	55.42
2.0	217	328	110.84
3.0	96	146	166.25
4.0	54	82	221.67

10W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1431	2191	39.23
2.0	358	548	78.45
3.0	159	247	117.68
4.0	90	137	156.90

12W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	951	1464	54.40
2.0	237	366	108.51
3.0	106	162	163.21
4.0	59	91	217.62

12W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1459	2232	39.30
2.0	365	558	78.60
3.0	162	248	117.90
4.0	91	139	157.19

15W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1028	1589	54.27
2.0	257	397	108.55
3.0	114	177	162.82
4.0	64	99	217.09


15W 36°



15°




24°

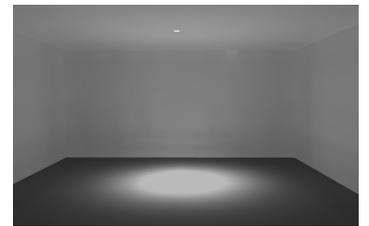


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

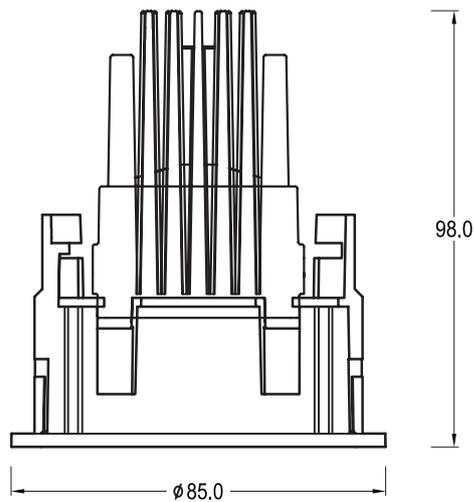

型号
JDF8043-Y


功率
10W / 12W / 15W

灯体颜色
白色 / 黑色

外观尺寸
Ø85*98mm
开孔尺寸
Ø75mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




10W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1130	1701	39.61
2.0	283	425	79.21
3.0	126	189	118.82
4.0	71	106	158.43




12W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1531	2300	39.46
2.0	383	575	78.92
3.0	170	256	118.39
4.0	96	144	157.85



15°




24°

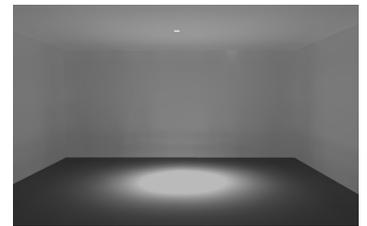


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

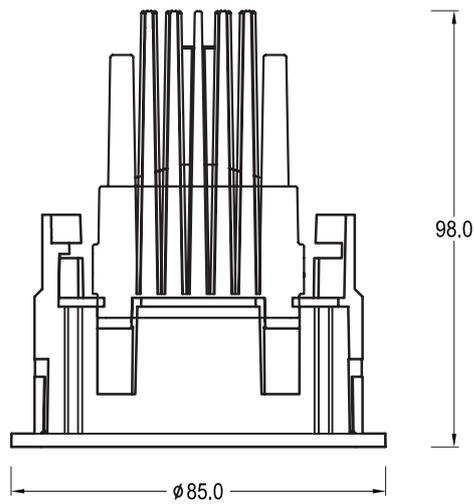

型号
JDF8043-T


功率
10W / 12W / 15W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 85 \times 98$ mm
开孔尺寸
 $\phi 75$ mm


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1129	1704	40.02
2.0	282	426	80.05
3.0	125	189	120.07
4.0	71	107	160.10

10W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1480	2233	40.10
2.0	370	558	80.19
3.0	164	248	120.29
4.0	93	140	160.39


15W 24°



15°




24°

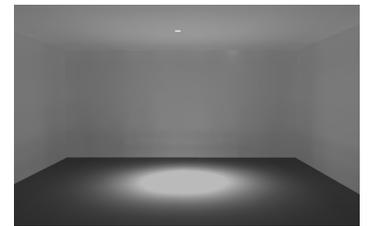


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

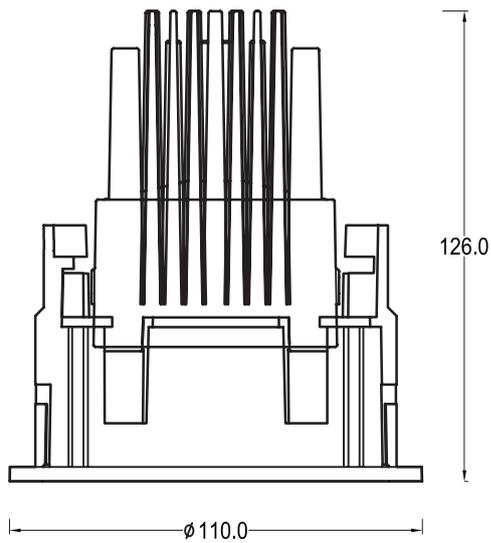

型号
JDF8044-W


功率
20W / 25W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 110 \times 126\text{mm}$
开孔尺寸
 $\phi 100\text{mm}$


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




20W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3019	4449	45.76
2.0	755	1112	91.52
3.0	355	494	137.27
4.0	188	278	183.03




25W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3386	4972	45.98
2.0	847	1243	91.96
3.0	376	553	137.94
4.0	212	311	183.91




20W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2749	4239	53.65
2.0	687	1060	107.31
3.0	305	471	160.96
4.0	172	265	214.42




25W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3153	4635	53.58
2.0	788	1159	107
3.0	350	515	160.74
4.0	197	290	214.32




20W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1997	3094	65.19
2.0	499	773	130.38
3.0	222	344	195.57
4.0	125	193	260.75




25W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2233	3454	65.15
2.0	558	863	130.30
3.0	248	384	195.45
4.0	140	216	260.60



15°




24°




36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

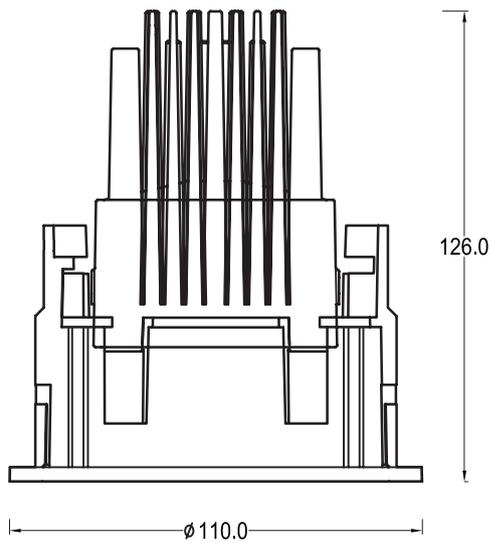

型号
JDF8045


功率
20W / 25W

灯体颜色
白色 / 黑色

外观尺寸
 $\phi 110 \times 126 \text{mm}$
开孔尺寸
 $\phi 100 \text{mm}$


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3019	4449	45.76
2.0	755	1112	91.52
3.0	355	494	137.27
4.0	188	278	183.03

20W 24°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1997	3094	65.19
2.0	499	1773	130.38
3.0	222	343	195.57
4.0	125	193	260.75

20W 36°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3386	4972	45.98
2.0	846	1243	91.96
3.0	376	552	137.94
4.0	211	310	183.91

25W 24°



H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2233	3454	65.15
2.0	558	863	130.30
3.0	248	383	195.45
4.0	139	215	260.60


25W 36°



15°




24°

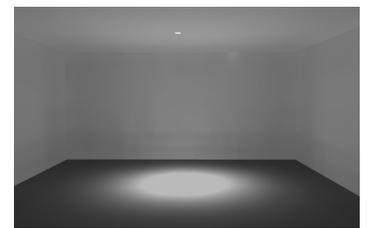


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

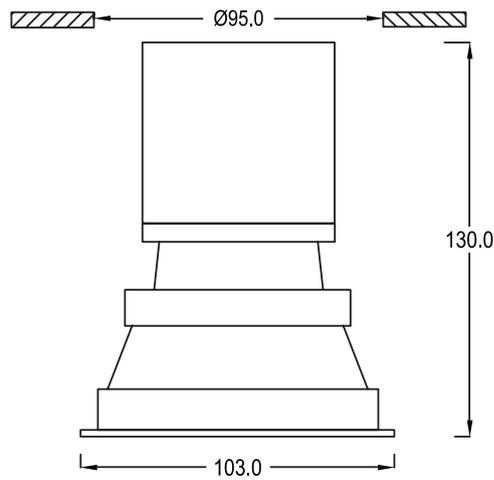

型号
JDF8026


功率
30W


灯体颜色
白色 / 黑色

外观尺寸
Ø103*130mm
开孔尺寸
Ø95mm


光束角
15° 24° 38°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	11603	17669	28.13
2.0	2901	4417	56.26
3.0	1289	1963	84.39
4.0	725	1104	112.52

30W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4563	6644	41.55
2.0	1141	1661	83.10
3.0	507	738	124.65
4.0	285	415	166.21


30W 24°



15°




24°

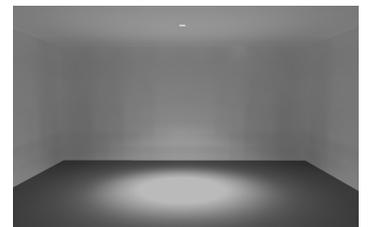


38°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

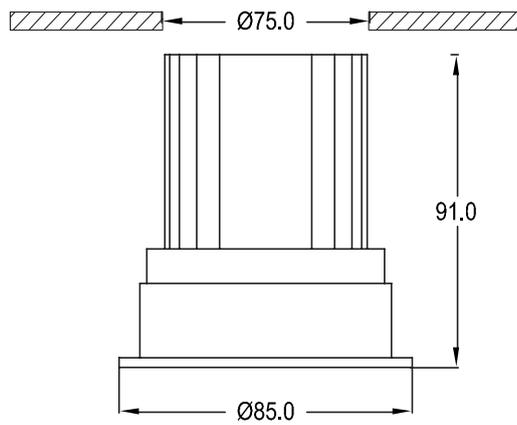

型号
JDF8073

功率
7W / 10W

灯体颜色
白色 / 黑色

外观尺寸
Ø 85*91mm
开孔尺寸
Ø 75mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




7W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	996	1519	61.75
2.0	249	380	123.5
3.0	111	169	185.25
4.0	62	95	247




10W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1170	1774	62
2.0	293	444	124.19
3.0	130	197	186.28
4.0	73	111	248.37



12°




24°

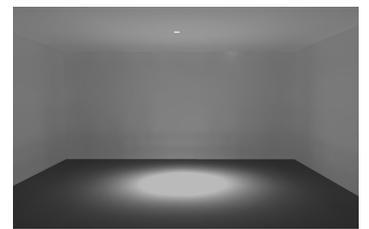


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

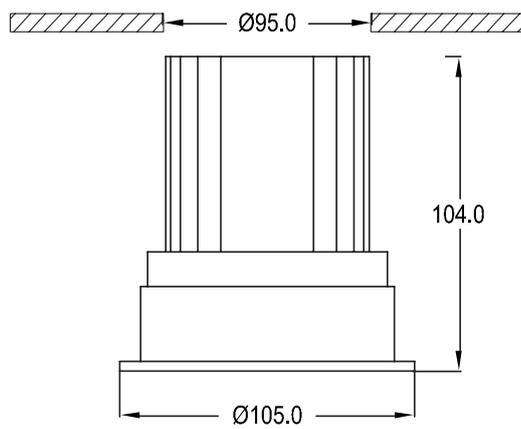

型号
JDF8074

功率
12W / 15W

灯体颜色
白色 / 黑色

外观尺寸
Ø105*104mm
开孔尺寸
Ø95mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1811	2736	54.2
2.0	453	684	108.4
3.0	201	304	162.59
4.0	113	171	216.79



15W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2289	3457	54.2
2.0	572	864	108.4
3.0	254	384	162.59
4.0	143	216	216.79



12°




24°

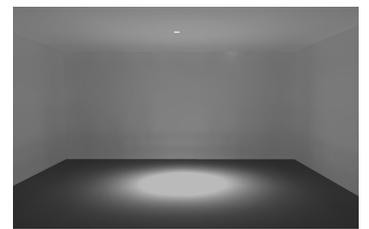


36°


色温可选



2700K




3000K



4000K

Phoenix 凤舞

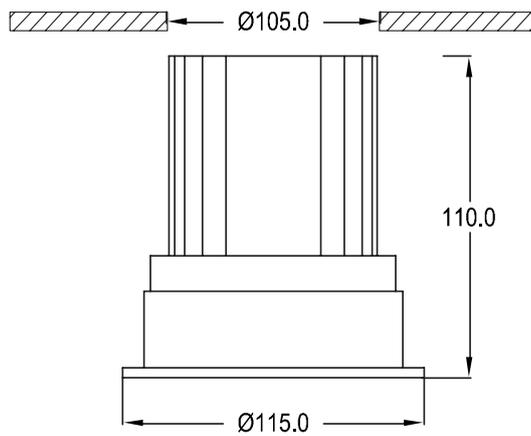

型号
JDF8075

功率
20W / 24W

灯体颜色
白色 / 黑色

外观尺寸
Ø115*110mm
开孔尺寸
Ø105mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)



20W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2271	3437	62.4
2.0	568	859	124.8
3.0	252	382	187.2
4.0	142	215	249.6




24W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2635	4003	62.19
2.0	659	1001	124.38
3.0	293	445	186.57
4.0	165	250	248.76



12°




24°




36°


色温可选



2700K



3000K




4000K





Nine 九耀

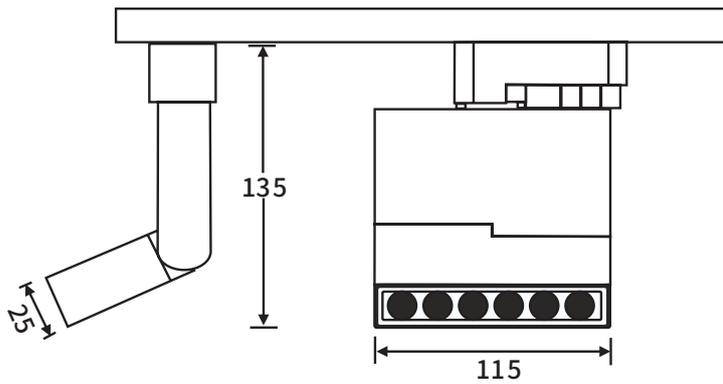

型号
JDJ9011



功率
6W

灯体颜色
白色 / 黑色

外观尺寸
115*25*135mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

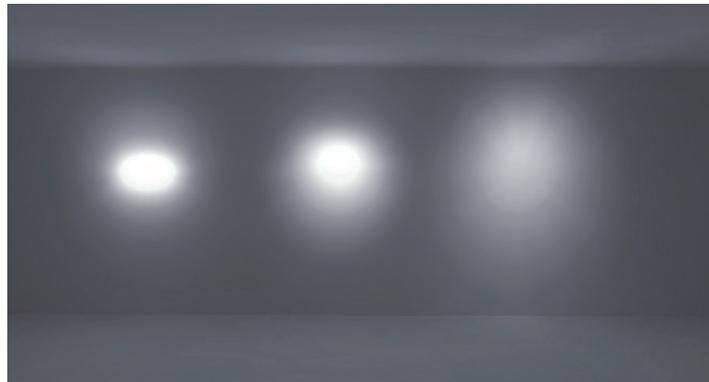





灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




6W 12°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4462	6897	23.90
2.0	1116	1724	47.81
3.0	495	766	71.71
4.0	278	431	95.62



12°




20°

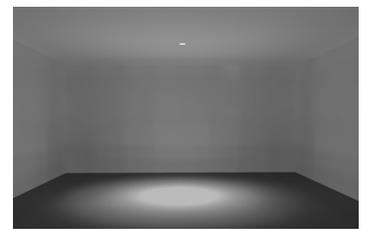


30°

色温可选



2700K



3000K




4000K



Nine

九耀

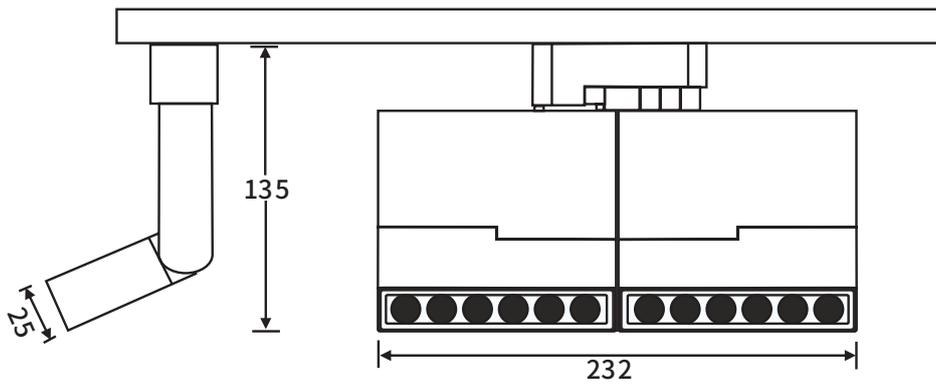

型号
JDJ9012




功率
12W

灯体颜色
白色 / 黑色

外观尺寸
232*25*135mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

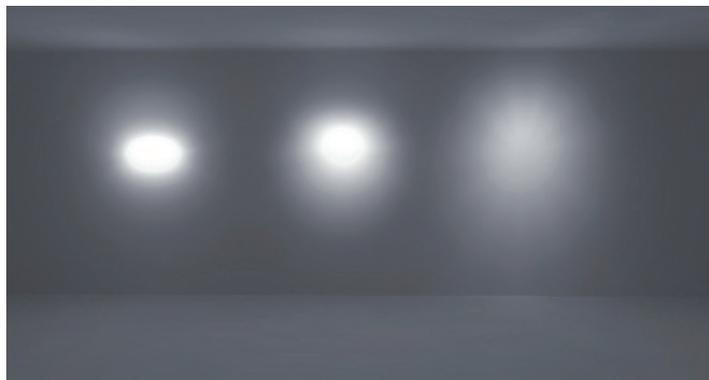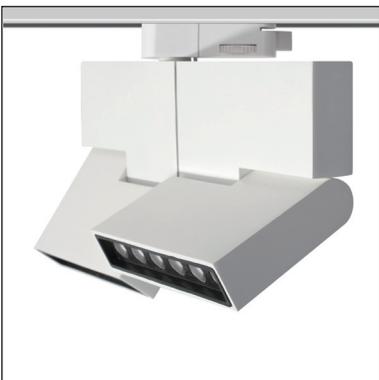





灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




12W 12°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	9139	13808	25.23
2.0	2285	3452	50.47
3.0	1015	1534	75.70
4.0	571	863	100.93



12°




20°

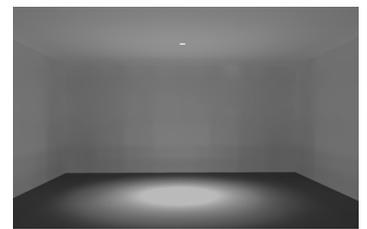


30°

色温可选



2700K




3000K



4000K



Nine
九耀

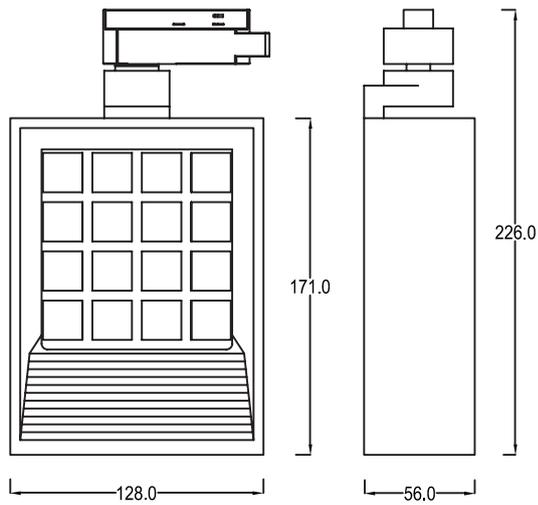

型号
JDJ9013

功率
25W / 35W


灯体颜色
白色 / 黑色

外观尺寸
226*56*128mm

开孔尺寸


光束角
30° 60° 90°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




25W 60°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1060	1613	122.51
2.0	265	403	245.01
3.0	118	179	367.52
4.0	66	101	490.03



25W 90°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	359	764	209.81
2.0	90	191	419.62
3.0	40	85	629.43
4.0	22	48	839.24



35W 30°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2221	3756	123.47
2.0	555	939	246.94
3.0	247	417	370.41
4.0	139	235	493.87



30°




60°

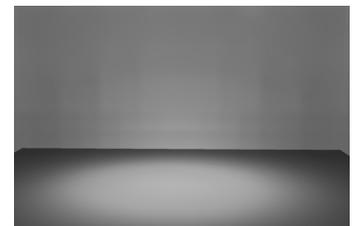


90°


色温可选



2700K




3000K



4000K

Nine 九耀

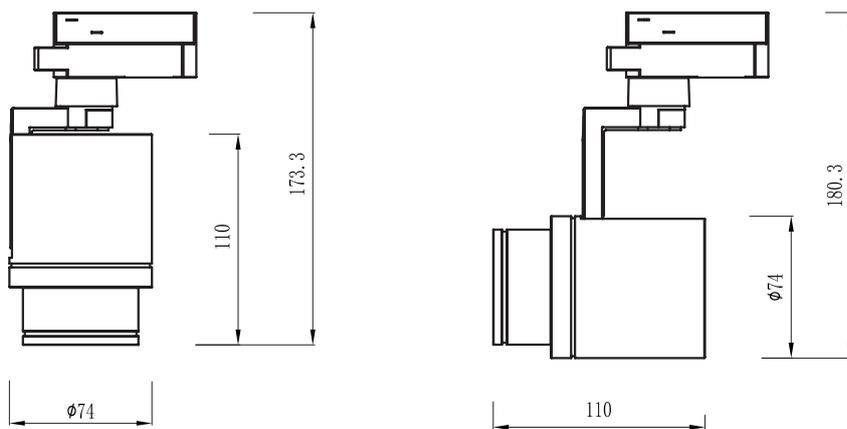

型号
JDJ9036


功率
20W

灯体颜色
白色 / 黑色

外观尺寸
74*110*173.3mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3468	4774	30.39
2.0	867	1193	60.79
3.0	385	530	91.18
4.0	217	298	121.57

20W 20°



12°




20°




30°


色温可选



2700K



3000K




4000K



Nine

九耀

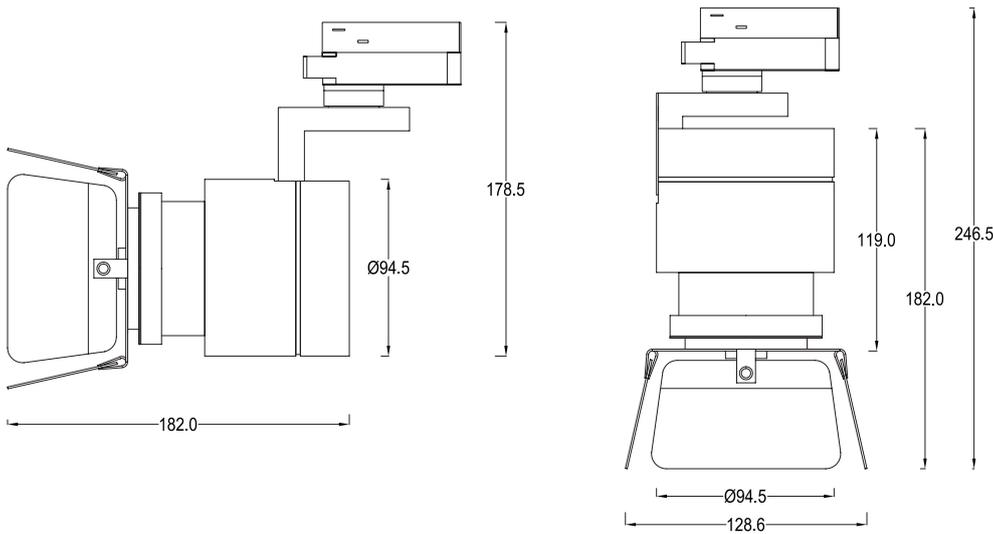

型号
JDJ9037


功率
20W

灯体颜色
白色 / 黑色

外观尺寸
94.5*182*246.5mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3468	4774	30.39
2.0	867	1193	60.79
3.0	385	530	91.18
4.0	217	298	121.57

20W 20°



12°




20°




30°


色温可选



2700K



3000K



4000K



Nine

九耀

型号
JDJ9038

功率
30W



灯体颜色
白色 / 黑色

外观尺寸
94.5*126*190.8mm

开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

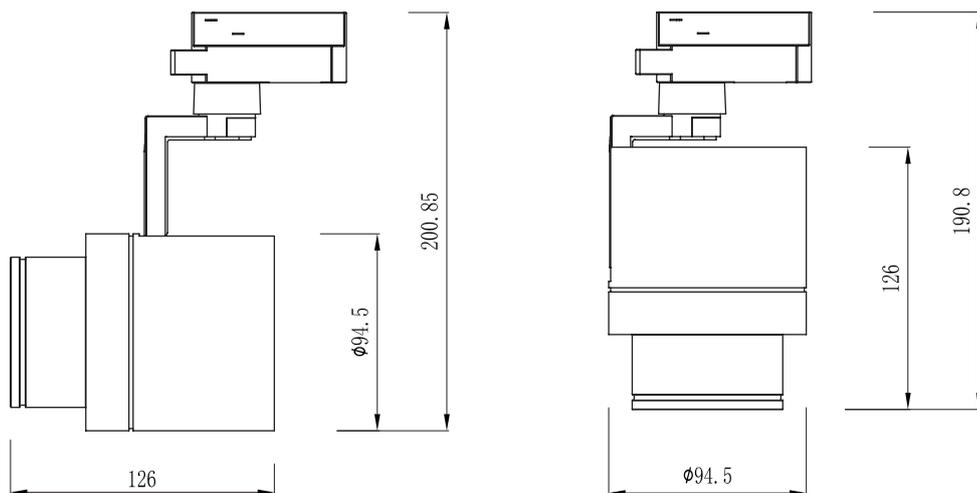





灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3468	4774	30.39
2.0	867	1193	60.79
3.0	385	530	91.18
4.0	217	298	121.57

30W 20°



12°




20°




30°


色温可选



2700K



3000K




4000K



Nine

九耀

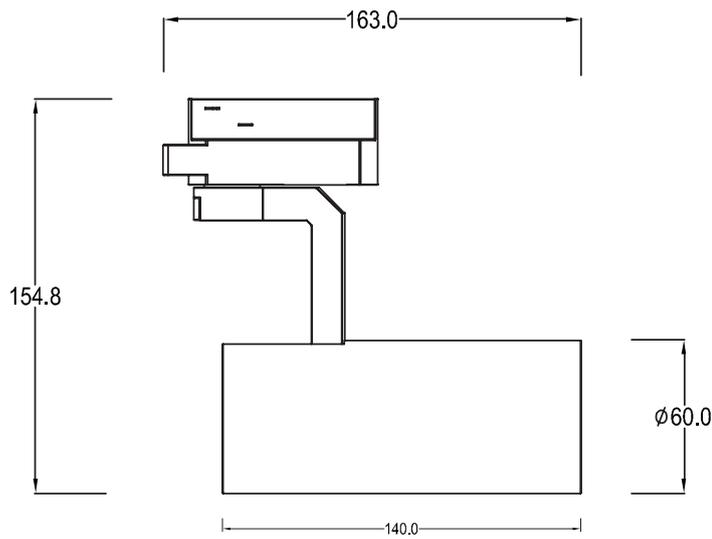

型号
JDJ9022


功率
7W / 10W / 12W / 15W

灯体颜色
白色 / 黑色

外观尺寸
Ø60*140*154.8mm
开孔尺寸
无


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




12W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6256	8576	24.40
2.0	1564	2144	48.08
3.0	695	953	71.26
4.0	391	536	94.96




15W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	8253	11298	24.19
2.0	2063	2825	47.38
3.0	917	1255	71.57
4.0	516	706	95.76




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2411	3312	45.42
2.0	603	828	89.38
3.0	268	368	133.92
4.0	151	207	179.60




15W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3138	4305	45.10
2.0	784	1076	90.32
3.0	349	478	134.37
4.0	196	269	179.73




12W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1403	1999	61.14
2.0	351	500	122.08
3.0	156	222	183.22
4.0	88	125	244.26




15W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1851	2658	61.39
2.0	463	665	121.30
3.0	206	295	182.87
4.0	116	166	243.66



15°




24°

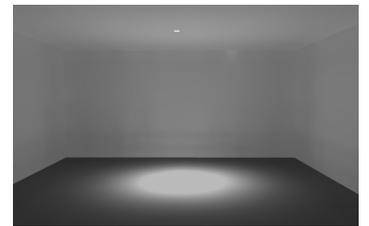


36°

色温可选



2700K



3000K




4000K



Nine

九耀

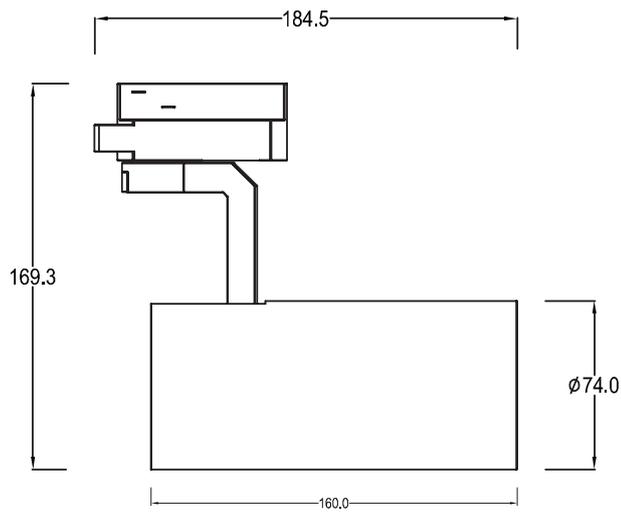

型号
JDJ9023


功率
20W / 25W

灯体颜色
白色 / 黑色

外观尺寸
Φ74*160*169.3mm
开孔尺寸
无


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




20W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	10468	14589	27.22
2.0	2617	3647	54.34
3.0	1163	1621	81.88
4.0	654	912	108.22




25W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	11387	16316	27.19
2.0	2847	4079	55.30
3.0	1265	1813	82.15
4.0	712	1020	110.33




20W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5223	7199	44.42
2.0	1306	1800	87.38
3.0	580	800	131.92
4.0	326	450	175.60




25W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6181	8586	47.10
2.0	1545	2147	94.32
3.0	687	954	141.37
4.0	386	537	189.73




20W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2542	3579	67.14
2.0	635	895	135.08
3.0	282	398	202.03
4.0	159	224	269.35




25W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2957	4173	69.39
2.0	739	1043	137.30
3.0	329	464	205.87
4.0	185	261	274.66



15°




24°

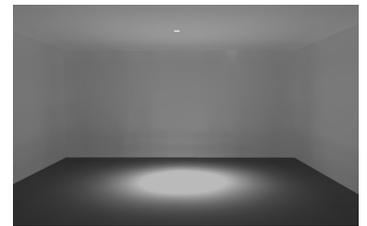


36°


色温可选



2700K



3000K




4000K



Nine

九耀

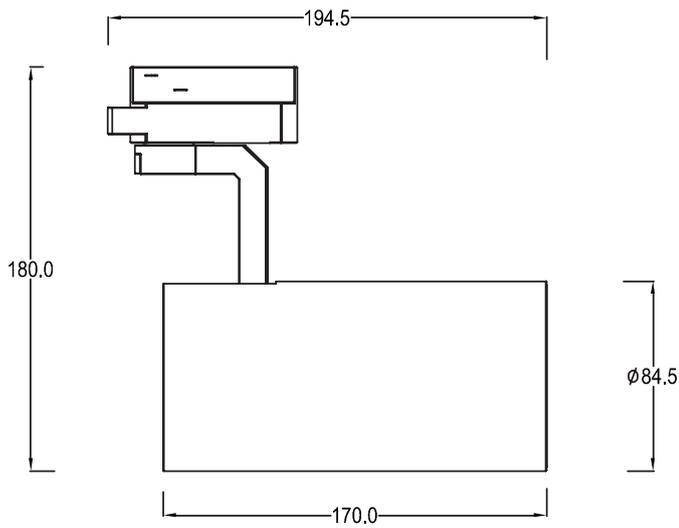

型号
JDJ9024


功率
30W / 35W

灯体颜色
白色 / 黑色

外观尺寸
Ø84.5*170*180mm
开孔尺寸
无


光束角
15° 24° 30°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




30W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	12087	19397	22.08
2.0	3022	4849	44.16
3.0	1343	2155	66.25
4.0	756	1212	88.33




30W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7513	11378	31.43
2.0	1878	2844	62.86
3.0	835	1264	94.929
4.0	470	711	125.72



15°




24°

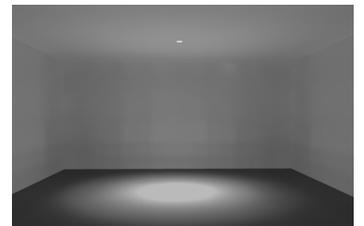


30°


色温可选



2700K




3000K



4000K



Nine 九耀

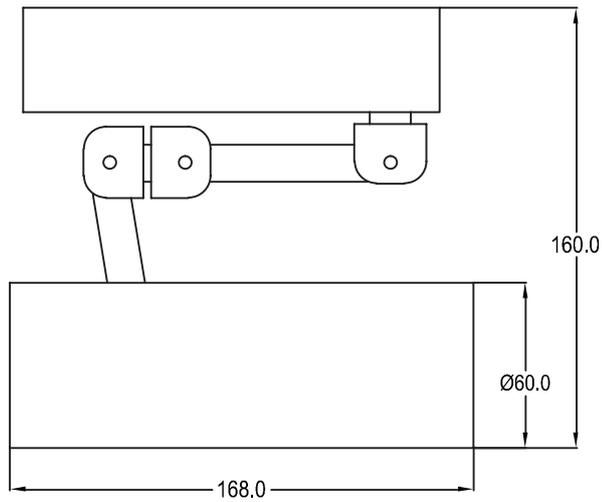

型号
JDJ9030



功率
12W / 15W / 18W

灯体颜色
白色 / 黑色

外观尺寸
60*168*160mm
开孔尺寸
无


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz

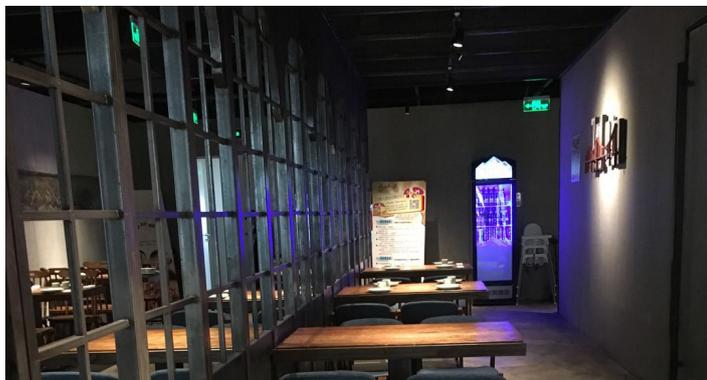





灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




12W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6256	8576	24.40
2.0	1564	2144	48.08
3.0	695	953	71.26
4.0	391	536	94.96




15W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	8253	11298	24.19
2.0	2063	2825	47.38
3.0	917	1255	71.57
4.0	516	706	95.76




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2411	3312	45.42
2.0	603	828	89.38
3.0	268	368	133.92
4.0	151	207	179.60




15W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3138	4305	45.10
2.0	784	1076	90.32
3.0	349	478	134.37
4.0	196	269	179.73




12W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1403	1999	61.14
2.0	351	500	122.08
3.0	156	222	183.22
4.0	88	125	244.26




15W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1851	2658	61.39
2.0	463	665	121.30
3.0	206	295	182.87
4.0	116	166	243.66



15°




24°

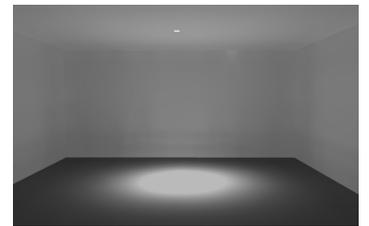


36°


色温可选



2700K



3000K




4000K



Nine

九耀

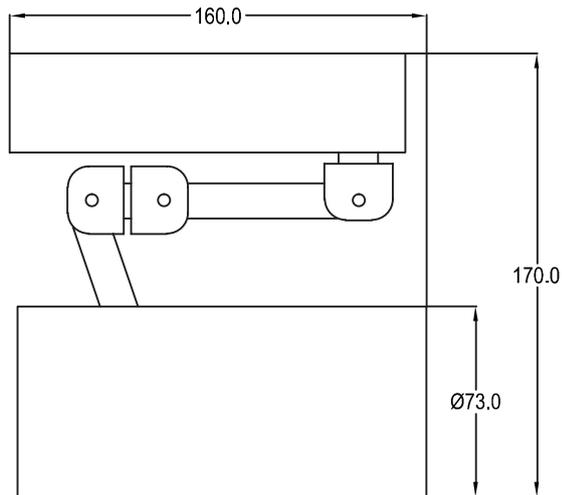

型号
JDJ9031


功率
20W / 25W / 30W

灯体颜色
白色 / 黑色

外观尺寸
73*160*170mm
开孔尺寸
无


光束角
15° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




20W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	10468	14589	27.22
2.0	2617	3647	54.34
3.0	1163	1621	81.88
4.0	654	912	108.22




25W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	11387	16316	27.19
2.0	2847	4079	55.30
3.0	1265	1813	82.15
4.0	712	1020	110.33




20W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5223	7199	44.42
2.0	1306	1800	87.38
3.0	580	800	131.92
4.0	326	450	175.60




25W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	6181	8586	47.10
2.0	1545	2147	94.32
3.0	687	954	141.37
4.0	386	537	189.73




20W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2542	3579	67.14
2.0	635	895	135.08
3.0	282	398	202.03
4.0	159	224	269.35




25W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2957	4173	69.39
2.0	739	1043	137.30
3.0	329	464	205.87
4.0	185	261	274.66



15°




24°

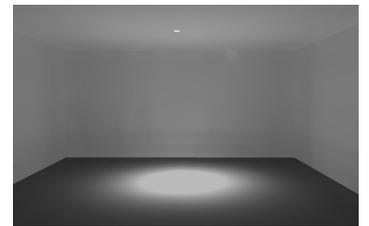


36°


色温可选



2700K




3000K



4000K

Nine 九耀

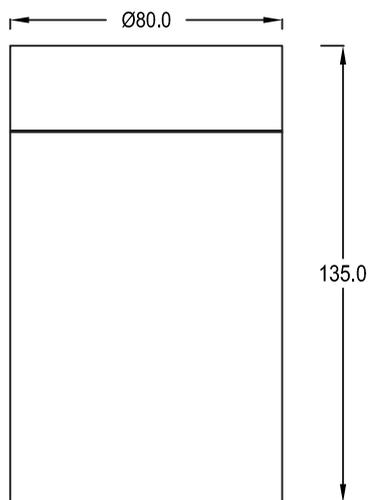

型号
JDT7111


功率
10W

灯体颜色
白色 / 黑色

外观尺寸
Ø 80*135mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




10W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	10297	16031	15.09
2.0	2574	4008	30.18
3.0	1144	1781	45.27
4.0	644	1002	60.36




10W 20°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3470	4856	30.36
2.0	867	1214	60.72
3.0	386	540	91.07
4.0	217	304	121.43



12°




20°

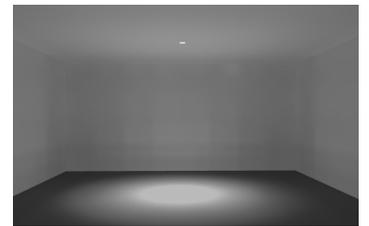


30°

色温可选



2700K




3000K



4000K

Nine 九耀

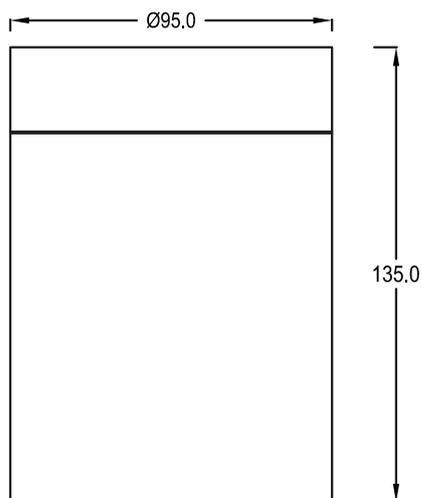

型号
JDT7113


功率
20W

灯体颜色
白色 / 黑色

外观尺寸
Ø 95*135mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3468	4774	30.39
2.0	867	1193	60.79
3.0	385	530	91.18
4.0	217	298	121.57

20W 20°



12°




20°




30°


色温可选



2700K




3000K



4000K

Nine 九耀

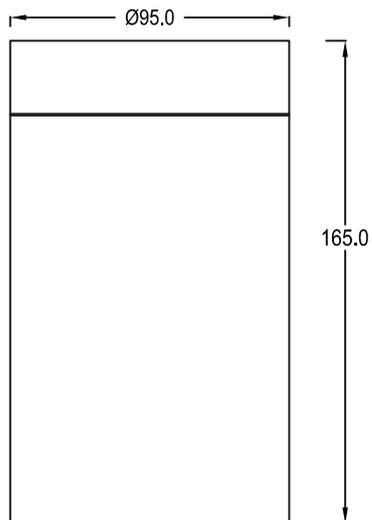

型号
JDT7114


功率
30W

灯体颜色
白色 / 黑色

外观尺寸
Ø 95*165mm
开孔尺寸
无


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




不可调光

配光曲线图 (3000K)




30W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	12087	19397	22.08
2.0	3022	4849	44.16
3.0	1343	2155	66.25
4.0	756	1212	88.33




30W 20°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7513	11378	31.43
2.0	1878	2844	62.86
3.0	835	1264	94.929
4.0	470	711	125.72



12°




20°

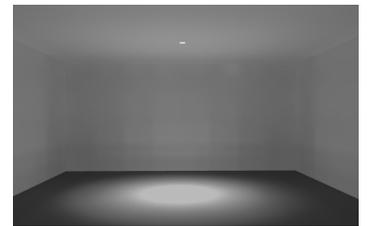


30°

色温可选



2700K




3000K



4000K

Nine 九耀

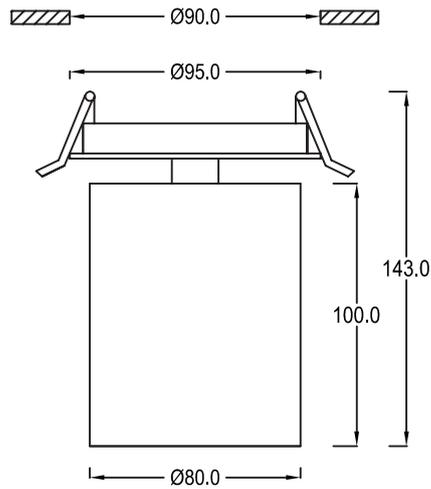

型号
JDT7121



功率
10W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 80 \times 143 \text{mm}$
开孔尺寸
 $\varnothing 90 \text{mm}$


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

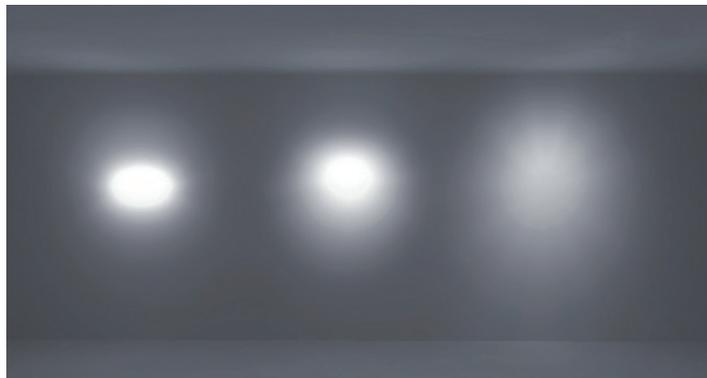





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




10W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	10297	16031	15.09
2.0	2574	4008	30.18
3.0	1144	1781	45.27
4.0	644	1002	60.36




10W 20°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3470	4856	30.36
2.0	867	1214	60.72
3.0	386	540	91.07
4.0	217	304	121.43



12°




20°

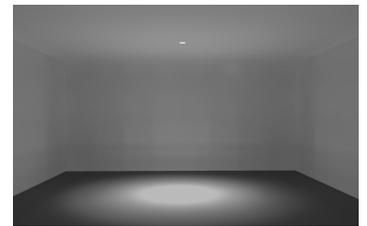


30°


色温可选



2700K




3000K



4000K

Nine 九耀

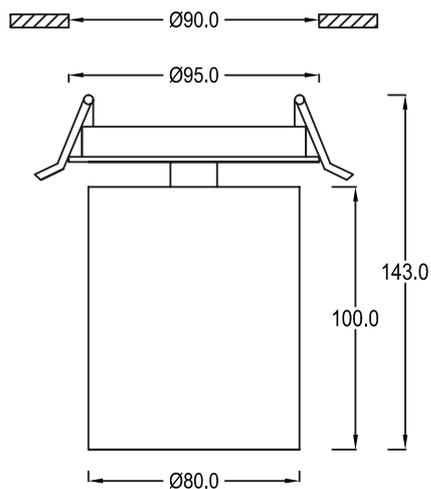

型号
JDT7122



功率
15W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 80 \times 143 \text{mm}$
开孔尺寸
 $\varnothing 90 \text{mm}$


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

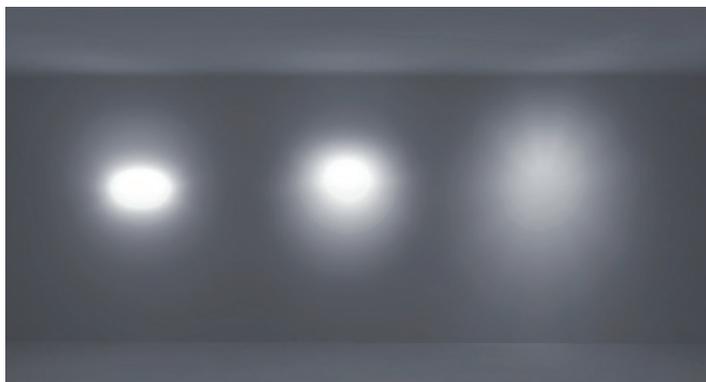





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	14972	23013	15.16
2.0	3743	5753	30.32
3.0	1664	2557	45.48
4.0	936	1438	60.65

15W 12°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4881	6861	30.22
2.0	1220	1715	60.43
3.0	542	762	90.65
4.0	305	429	120.86


15W 20°



12°




20°

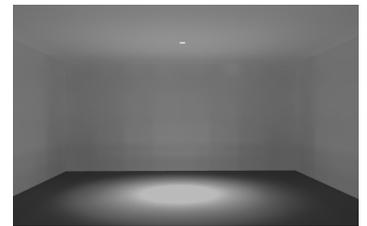


30°


色温可选



2700K




3000K



4000K

Nine 九耀

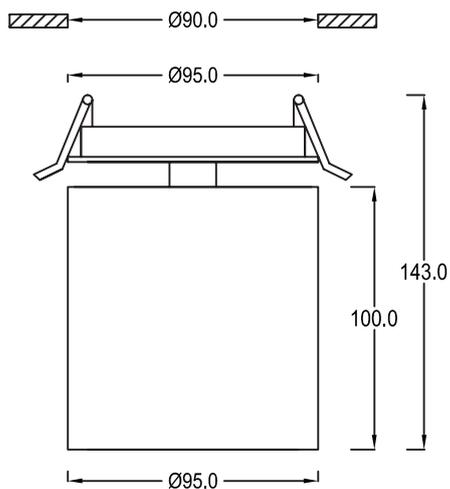

型号
JDT7123



功率
20W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 95 \times 143\text{mm}$
开孔尺寸
 $\varnothing 90\text{mm}$


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

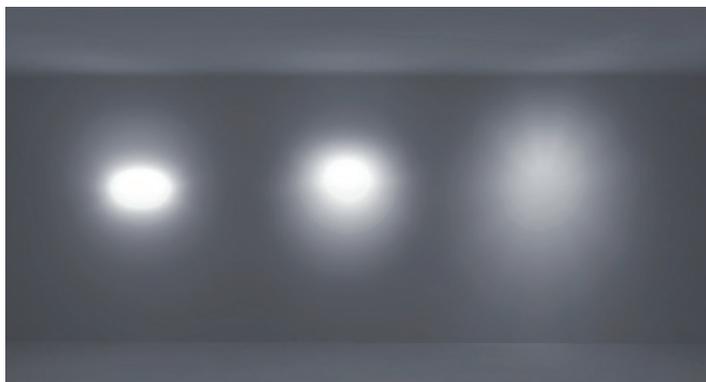





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3468	4774	30.39
2.0	867	1193	60.79
3.0	385	530	91.18
4.0	217	298	121.57


20W 20°



12°




20°

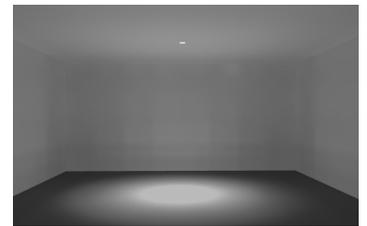


30°


色温可选



2700K




3000K



4000K

Nine 九耀

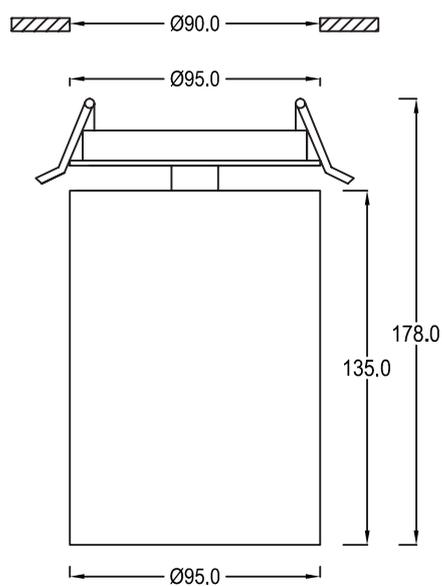

型号
JDT7124



功率
30W

灯体颜色
白色 / 黑色

外观尺寸
Ø 95*178mm
开孔尺寸
Ø 90mm


光束角
12° 20° 30°

输入电压
AC 100-265V 50/60Hz

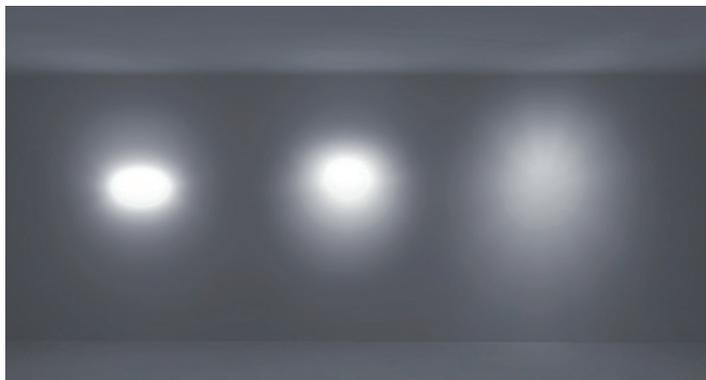





灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




30W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	12087	19397	22.08
2.0	3022	4849	44.16
3.0	1343	2155	66.25
4.0	756	1212	88.33




30W 20°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	7513	11378	31.43
2.0	1878	2844	62.86
3.0	835	1264	94.929
4.0	470	711	125.72



12°




20°

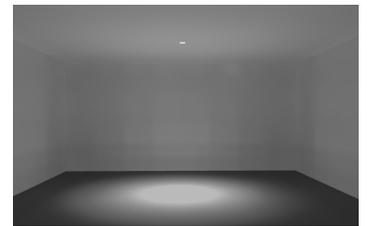


30°


色温可选



2700K



3000K




4000K





SKY
天际

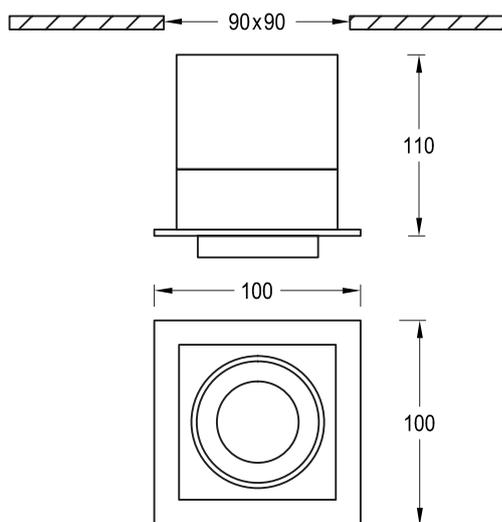

型号
JDT7091

功率
7W / 10W / 12W


灯体颜色
白色 / 黑色

外观尺寸
Ø 100*100*110mm

开孔尺寸
90*90mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




7W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2878	4394	32.18
2.0	719	1098	64.36
3.0	320	488	96.55
4.0	180	275	128.73




7W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	934	1366	63.21
2.0	233	341	126.41
3.0	104	152	189.62
4.0	58	85	252.82




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3923	5987	32.04
2.0	981	1497	64.08
3.0	436	665	96.12
4.0	245	374	128.16




12W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1278	1861	63.21
2.0	320	465	126.41
3.0	142	207	189.62
4.0	80	116	252.82



12°




24°

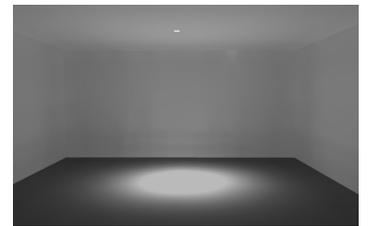


36°


色温可选



2700K




3000K



4000K

SKY
天际

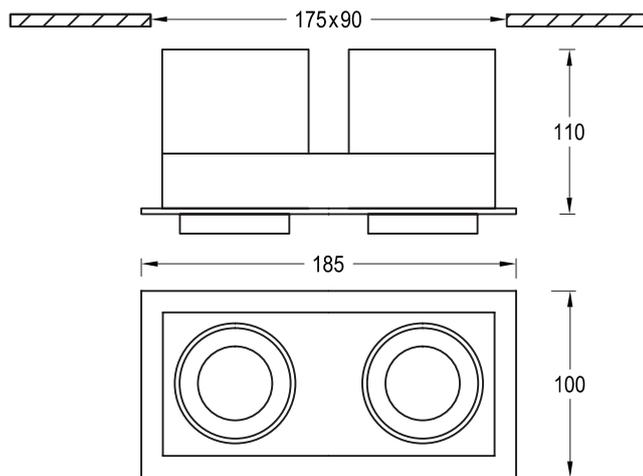

型号
JDT7092


功率
2*7W / 2*12W

灯体颜色
白色 / 黑色

外观尺寸
Ø 185*100*110mm
开孔尺寸
175*90mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




2*7W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4354	6100	29.61
2.0	1088	1525	59.22
3.0	484	678	88.82
4.0	272	381	118.43




2*12W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5552	9882	34.05
2.0	1388	2470	68.09
3.0	617	1098	102.14
4.0	347	618	136.19



12°




24°

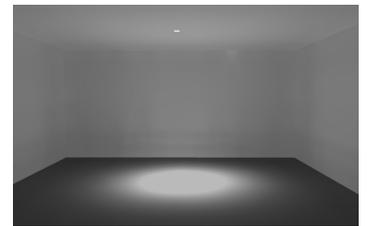


36°


色温可选



2700K




3000K



4000K

SKY
天际

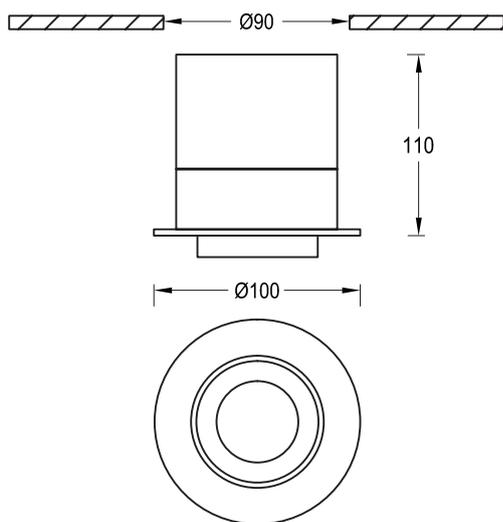

型号
JDT7093


功率
7W / 10W / 12W

灯体颜色
白色 / 黑色

外观尺寸
Ø 100*110mm
开孔尺寸
Ø 90mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




7W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2878	4394	32.18
2.0	719	1098	64.36
3.0	320	488	96.55
4.0	180	275	128.73




7W 36°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	934	1366	63.21
2.0	233	341	126.41
3.0	104	152	189.62
4.0	58	85	252.82




12W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3923	5987	32.04
2.0	981	1497	64.08
3.0	436	665	96.12
4.0	245	374	128.16




12W 36°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1278	1861	63.21
2.0	320	465	126.41
3.0	142	207	189.62
4.0	80	116	252.82



12°




24°

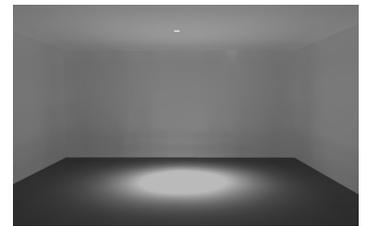


36°


色温可选



2700K




3000K



4000K

SKY
天际

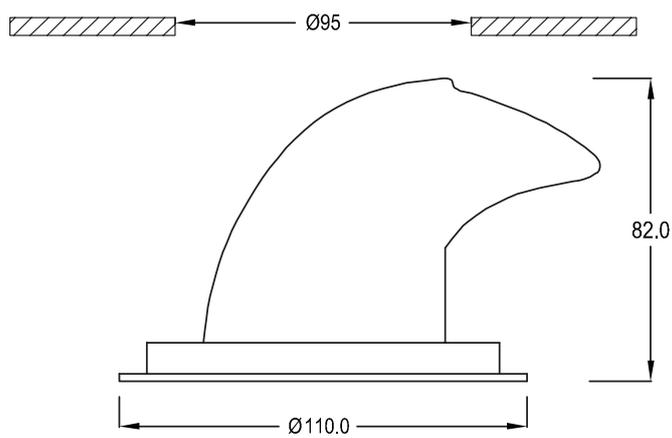

型号
JDT7081


功率
7W / 12W

灯体颜色
白色 / 黑色

外观尺寸
Ø 110*82mm
开孔尺寸
Ø 95mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




7W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2890	4324	21.57
2.0	723	1081	43.14
3.0	321	481	64.71
4.0	181	27	86.28




7W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3051	4715	23.96
2.0	763	1179	47.91
3.0	339	524	71.87
4.0	191	295	95.83




12W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4084	6117	21.66
2.0	1021	1529	43.32
3.0	454	680	64.97
4.0	255	413382	86.63




12W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3901	6599	24.97
2.0	975	1650	43.32
3.0	433	733	64.97
4.0	244	413	86.63



12°




24°

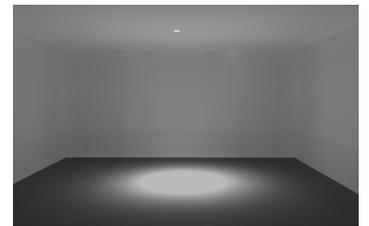


36°


色温可选



2700K




3000K



4000K

SKY
天际

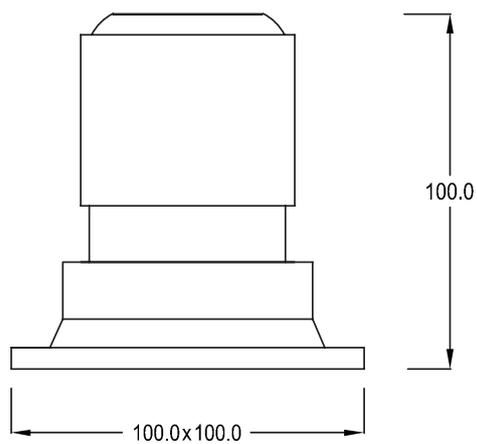

型号
JDT7031


功率
7W / 12W

灯体颜色
白色 / 黑色

外观尺寸
100*100*100mm
开孔尺寸
90*90mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




7W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	3955	5560	23.89
2.0	989	1390	47.77
3.0	440	617	71.66
4.0	247	347	95.54




7W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1417	2075	46.64
2.0	354	518	93.28
3.0	157	230	139.82
4.0	88	129	186.56




12W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4840	7437	23.74
2.0	1210	1859	47.49
3.0	538	826	71.23
4.0	302	465	94.98




12W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1754	2846	42.88
2.0	438	712	85.77
3.0	195	316	128.65
4.0	109	178	171.53



12°




24°

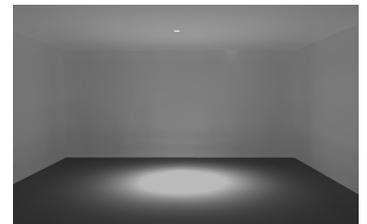


36°

色温可选



2700K




3000K



4000K

SKY
天际

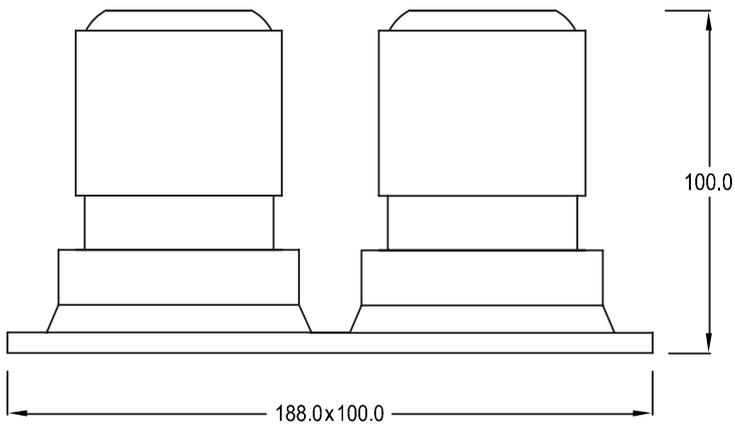

型号
JDT7032


功率
2*7W / 2*12W

灯体颜色
白色 / 黑色

外观尺寸
188*100*100mm
开孔尺寸
175*90mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)





2*7W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	4354	6100	29.61
2.0	1088	1525	59.22
3.0	484	678	88.82
4.0	272	381	118.43




2*12W 24°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	5552	9882	34.05
2.0	1388	2470	68.09
3.0	617	1098	102.14
4.0	347	618	136.19



12°




24°

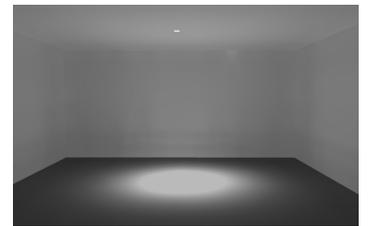


36°


色温可选



2700K



3000K




4000K





SKY
天际

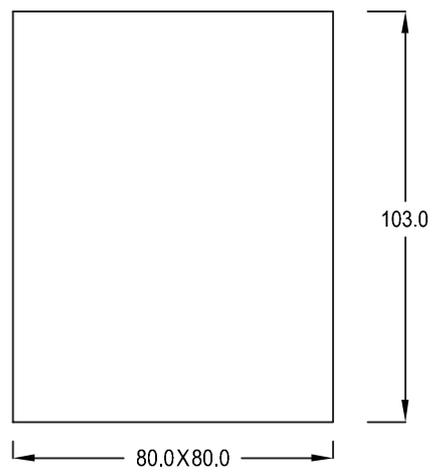

型号
JDM6013

功率
7W / 10W



灯体颜色
白色 / 黑色

外观尺寸
80*80*103mm

开孔尺寸
无


光束角
38°

输入电压
AC 100-265V 50/60Hz

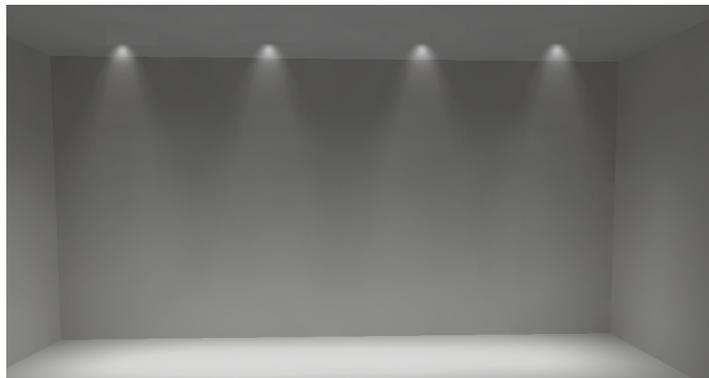





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	630	935	66.58
2.0	158	234	133.16
3.0	70	104	199.75
4.0	39	58	266.33

7W 38°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	716	1054	66.54
2.0	179	264	133.09
3.0	80	117	199.63
4.0	45	66	266.17

10W 38°




38°


色温可选



2700K




3000K



4000K

SKY
天际

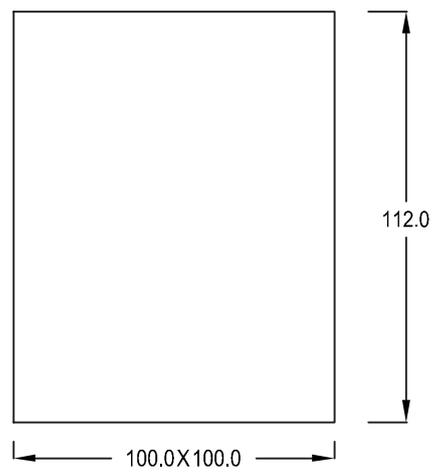

型号
JDM6014

功率
15W



灯体颜色
白色 / 黑色

外观尺寸
100*100*112mm

开孔尺寸
无


光束角
38°

输入电压
AC 100-265V 50/60Hz

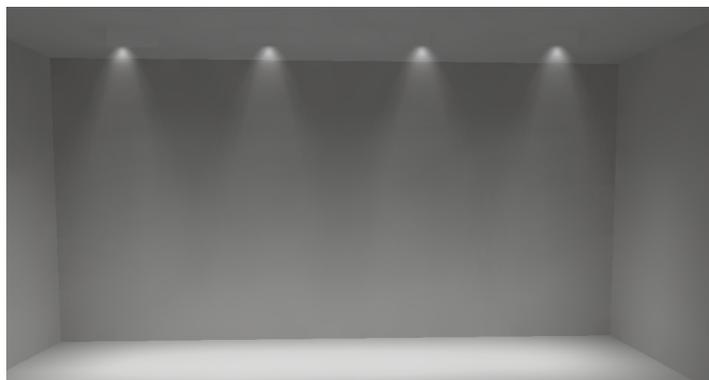





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	932	1356	64.17
2.0	233	339	128.33
3.0	104	151	192.50
4.0	58	85	256.67

15W 38°




38°


色温可选



2700K




3000K



4000K

SKY
天际

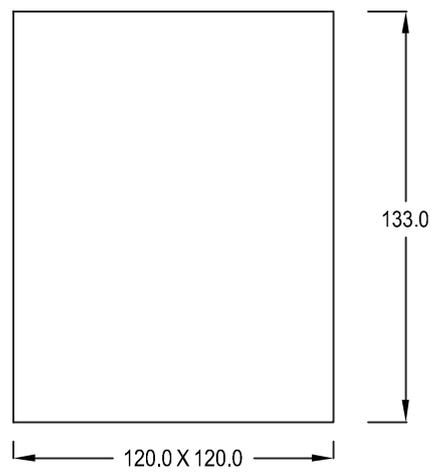

型号
JDM6015

功率
20W


灯体颜色
白色 / 黑色


外观尺寸
120*120*133mm

开孔尺寸
无


光束角
38°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1679	2554	75.89
2.0	420	639	151.77
3.0	187	284	227.66
4.0	105	160	303.55

20W 38°




38°


色温可选



2700K




3000K



4000K

SKY
天际

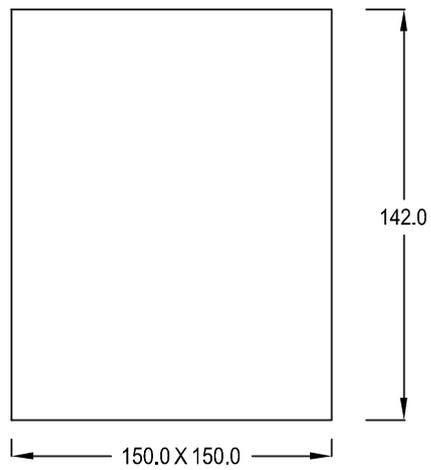

型号
JDM6016

功率
24W


灯体颜色
白色 / 黑色

外观尺寸
150*150*142mm

开孔尺寸
无


光束角
38°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1730	2639	75.73
2.0	433	660	151.46
3.0	192	293	227.18
4.0	108	165	302.91

24W 38°




38°


色温可选



2700K




3000K



4000K

SKY
天际

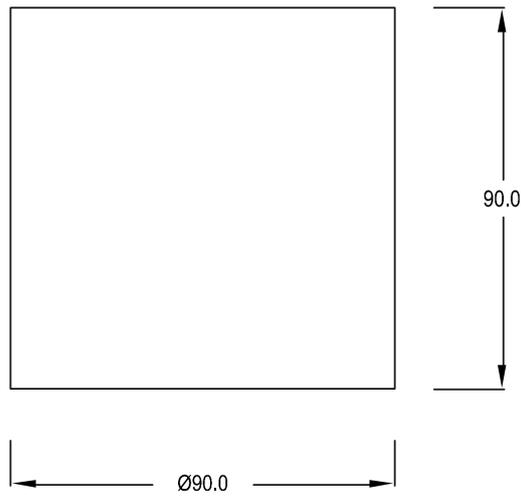

型号
JDM6002

功率
10W



灯体颜色
白色 / 黑色

外观尺寸
Ø90*90mm

开孔尺寸
无


光束角
50°

输入电压
AC 100-265V 50/60Hz

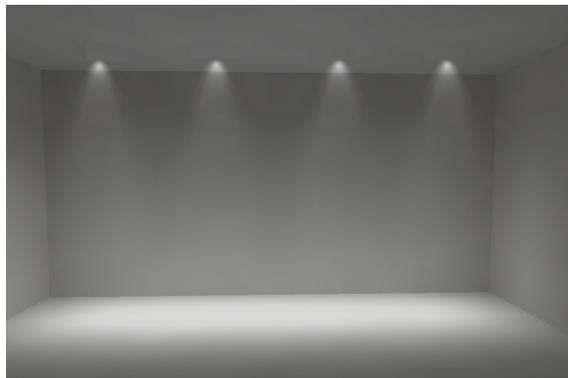





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	514	813	90.93
2.0	129	203	181.86
3.0	57	90	272.80
4.0	32	51	363.73

10W 50°




50°


色温可选



2700K




3000K



4000K

SKY
天际

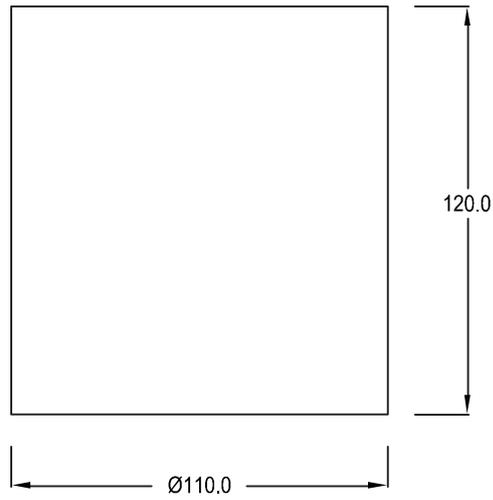

型号
JDM6003



功率
12W / 15W

灯体颜色
白色 / 黑色

外观尺寸
Ø110*120mm
开孔尺寸
无


光束角
50°

输入电压
AC 100-265V 50/60Hz

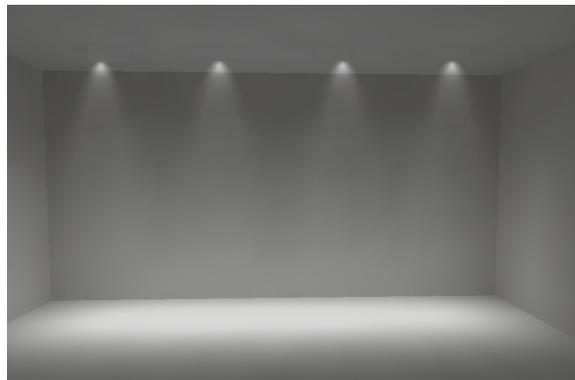





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




12W 50°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	514	813	90.93
2.0	129	203	181.86
3.0	57	90	272.80
4.0	32	51	363.73




15W 50°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	591	932	91.12
2.0	148	233	182.24
3.0	66	104	273.37
4.0	37	58	364.49




50°


色温可选



2700K




3000K



4000K

SKY
天际

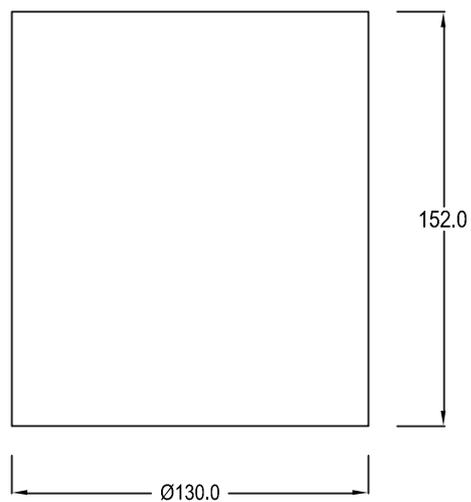

型号
JDM6004

功率
20W / 25W



灯体颜色
白色 / 黑色


外观尺寸
Ø130*152mm

开孔尺寸
无


光束角
50°

输入电压
AC 100-265V 50/60Hz

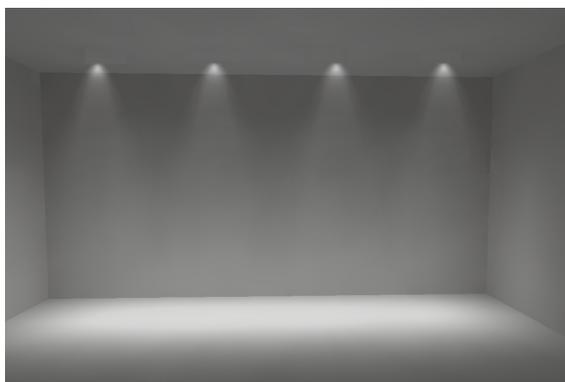





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




20W 50°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1538	2343	75.81
2.0	385	586	151.62
3.0	171	260	227.42
4.0	96	146	303.23




25W 50°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1679	2554	75.89
2.0	420	639	151.77
3.0	187	284	227.66
4.0	105	160	303.55




50°


色温可选



2700K




3000K



4000K

SKY
天际

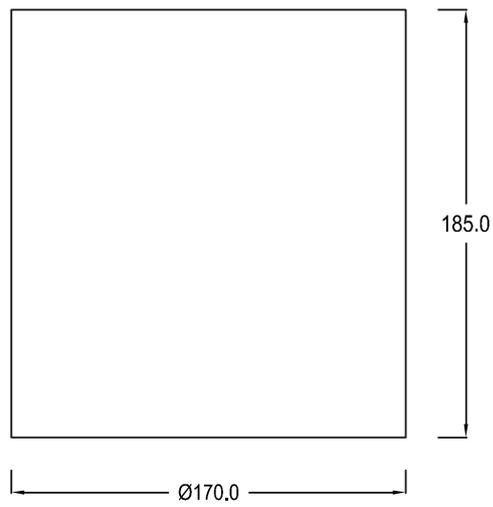

型号
JDM6005



功率
30W / 35W

灯体颜色
白色 / 黑色

外观尺寸
Ø170*185mm
开孔尺寸
无


光束角
50°

输入电压
AC 100-265V 50/60Hz

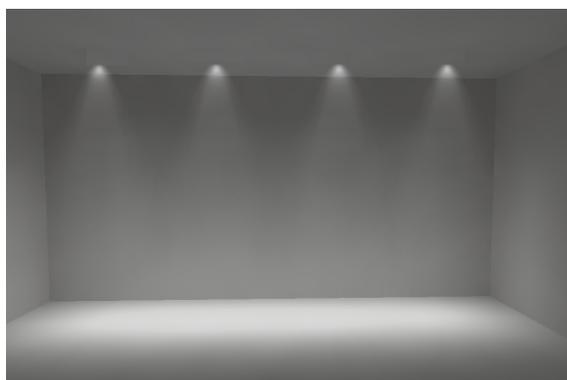





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2234	3464	92.73
2.0	559	866	185.46
3.0	248	385	278.19
4.0	140	217	370.91

30W 50°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2730	4234	92.81
2.0	683	1058	185.63
3.0	303	470	278.44
4.0	171	265	371.25

35W 50°




50°


色温可选



2700K




3000K



4000K

SKY
天际

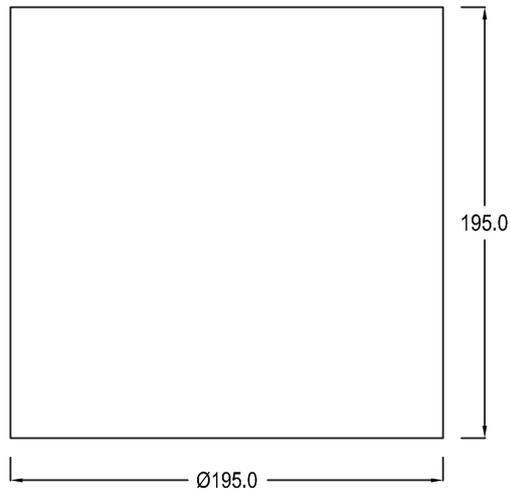

型号
JDM6006



功率
40W / 45W

灯体颜色
白色 / 黑色

外观尺寸
Ø195*195mm
开孔尺寸
无


光束角
50°

输入电压
AC 100-265V 50/60Hz

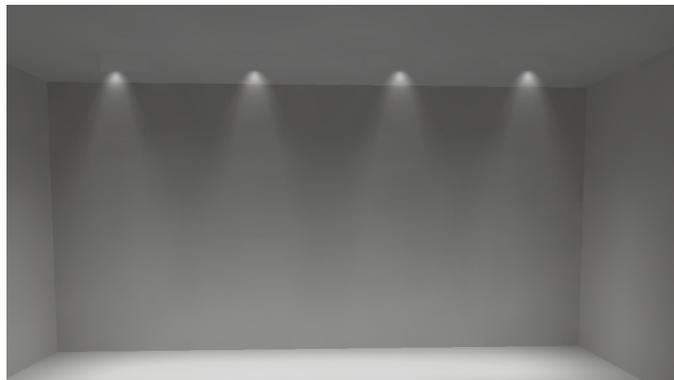





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2234	3464	92.73
2.0	559	866	185.46
3.0	248	385	278.19
4.0	140	217	370.91

40W 50°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2730	4234	92.81
2.0	683	1058	185.63
3.0	303	470	278.44
4.0	171	265	371.25

45W 50°




50°


色温可选



2700K




3000K



4000K

SKY
天际

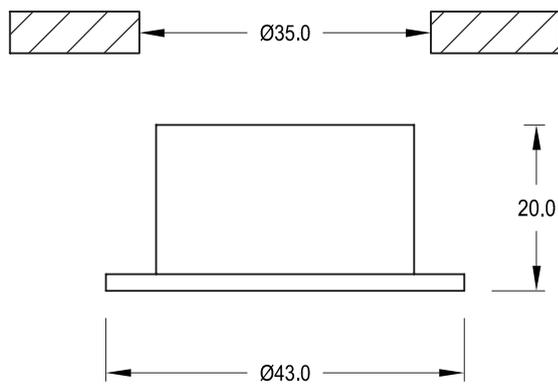

型号
JDT7041

功率
2W

灯体颜色
白色 / 黑色

外观尺寸
Ø43*20mm
开孔尺寸
Ø35mm


光束角
15° 25° 40°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	710	1060	30.43
2.0	178	265	60.86
3.0	79	118	91.29
4.0	44	66	121.72

2W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	441	716	32.65
2.0	110	179	65.30
3.0	49	80	97.94
4.0	28	45	130.59


2W 25°



15°




25°

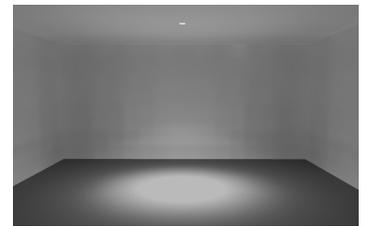


40°


色温可选



2700K




3000K



4000K

SKY
天际

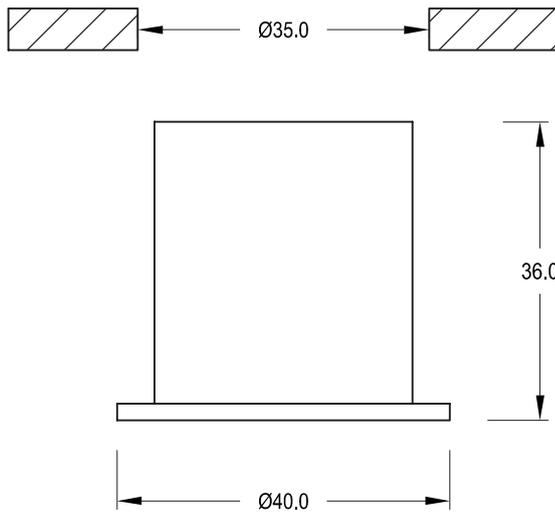

型号
JDT7042


功率
2W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 40 \times 36 \text{mm}$
开孔尺寸
 $\varnothing 35 \text{mm}$


光束角
15° 25° 40°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热




便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




2W 15°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	710	1060	30.43
2.0	178	265	60.86
3.0	79	118	91.29
4.0	44	66	121.72




2W 25°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	441	716	32.65
2.0	110	179	65.30
3.0	49	80	97.94
4.0	28	45	130.59



15°




25°

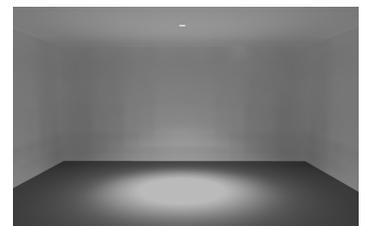


40°


色温可选



2700K




3000K



4000K

SKY
天际

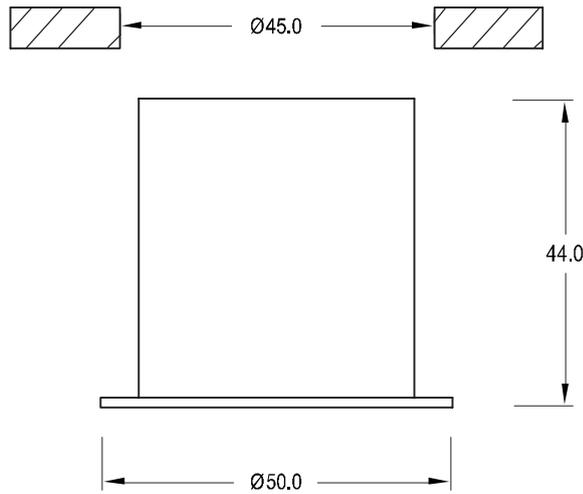

型号
JDT7043


功率
3W

灯体颜色
白色 / 黑色

外观尺寸
 $\Phi 50 \times 44 \text{mm}$
开孔尺寸
 $\Phi 45 \text{mm}$


光束角
 $15^\circ \ 25^\circ \ 40^\circ$

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	710	1060	30.43
2.0	178	265	60.86
3.0	79	118	91.29
4.0	44	66	121.72

3W 15°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	441	716	32.65
2.0	110	179	65.30
3.0	49	80	97.94
4.0	28	45	130.59

3W 25°




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	148	219	77.91
2.0	37	55	155.82
3.0	16	24	233.73
4.0	9	14	311.65


3W 40°



15°




25°

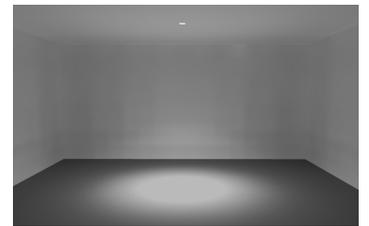


40°


色温可选



2700K




3000K



4000K

SKY
天际

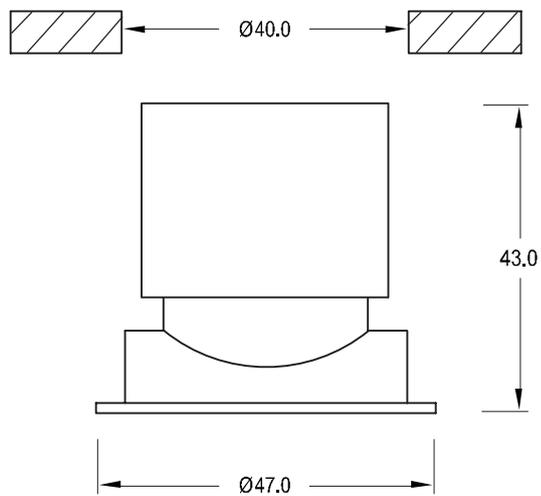

型号
JDT7044



功率
2W

灯体颜色
白色 / 黑色

外观尺寸
 $\varnothing 47 * 43 \text{mm}$
开孔尺寸
 $\varnothing 40 \text{mm}$


光束角
15° 25° 40°

输入电压
AC 100-265V 50/60Hz

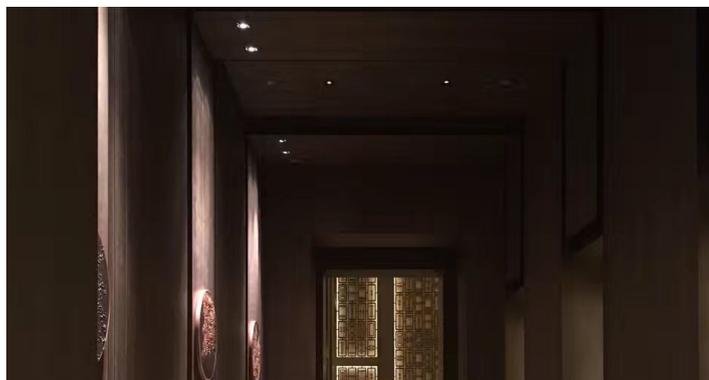





灯体
白色 / 黑色
铝材型



LED 光源
CREE




光学透镜
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




3W 25°


H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	646	992	25.75
2.0	162	248	51.49
3.0	72	110	77.24
4.0	40	62	102.99



15°




25°

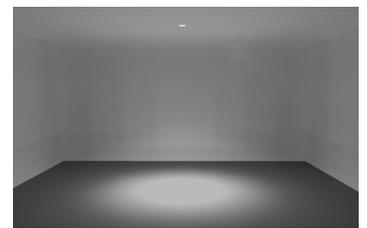


40°


色温可选



2700K




3000K



4000K

SKY
天际

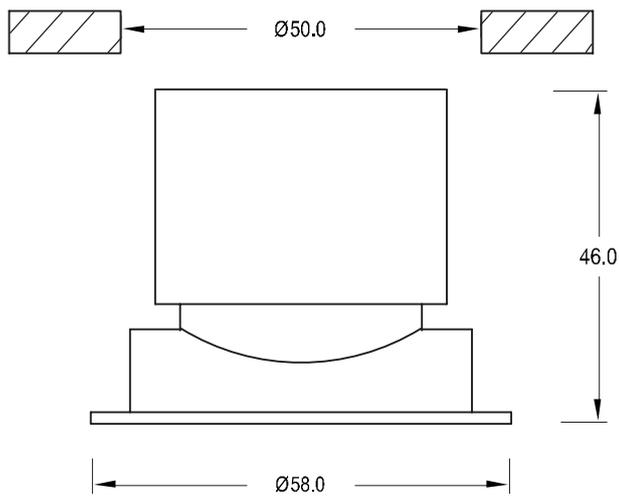

型号
JDT7045



功率
5W

灯体颜色
白色 / 黑色

外观尺寸
Ø58*46mm
开孔尺寸
Ø50mm


光束角
15° 25° 40°

输入电压
AC 100-265V 50/60Hz

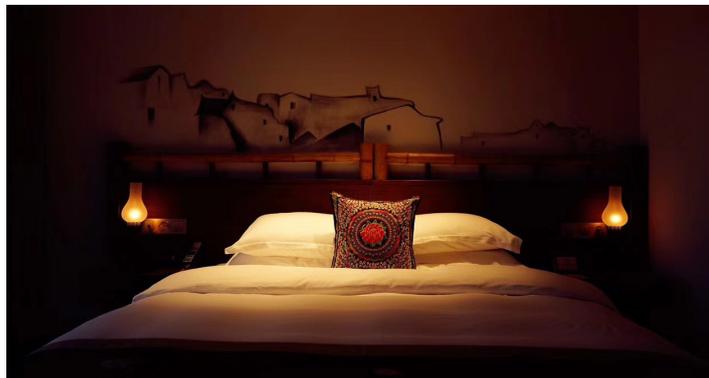





灯体
白色 / 黑色
铝材型



LED 光源
CREE




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	1304	2139	18.36
2.0	326	535	36.72
3.0	145	238	55.08
4.0	81	134	73.44


5W 15°



15°




25°

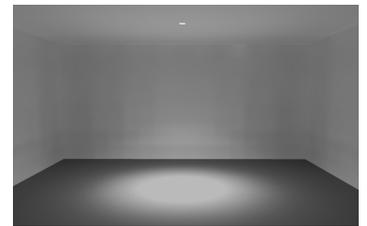


40°


色温可选



2700K




3000K



4000K

SKY
天际

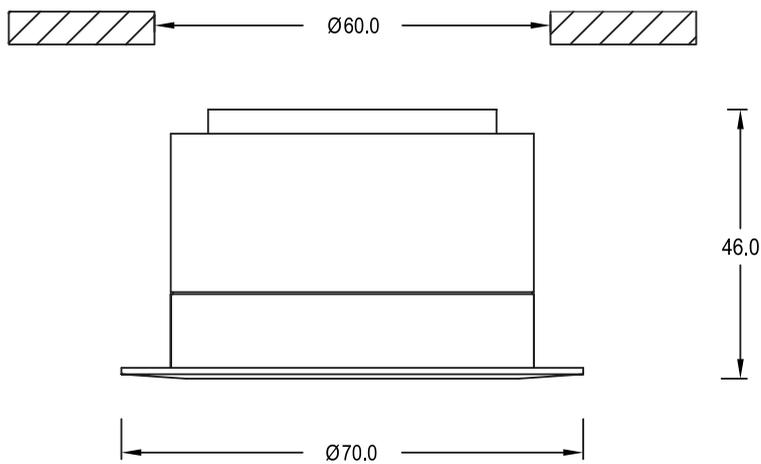

型号
JDT7071

功率
3W / 5W

灯体颜色
白色 / 黑色

外观尺寸
Ø70*46mm
开孔尺寸
Ø60mm


光束角
12° 24° 36°

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
高密芯片




反光杯
高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V

配光曲线图 (3000K)




5W 12°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	2068	2886	23.94
2.0	517	721	47.88
3.0	230	320	71.82
4.0	129	180	95.76




5W 24°

H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	757	1114	42.13
2.0	189	278	84.27
3.0	84	123	126.40
4.0	47	70	168.54




12°




24°


色温可选



2700K




3000K



4000K

SKY
天际

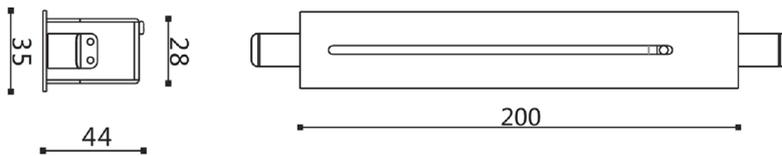

型号
JDB2001

功率
2W

灯体颜色
白色 / 黑色

外观尺寸
200*35*44mm
开孔尺寸
195*30mm


光束角

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE



高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度



不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	0.0108	0.26015	74.56
2.0	0.0027	0.0651	149.13
3.0	0.0012	0.0289	223.69
4.0	0.0007	0.01631	298.25


2W



色温可选



2700K




3000K



4000K

SKY
天际

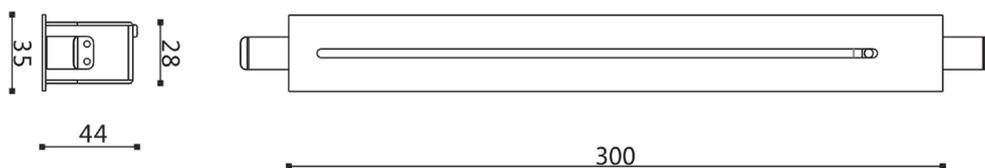

型号
JDB2002


功率
2W

灯体颜色
白色 / 黑色

外观尺寸
300*35*44mm
开孔尺寸
295*30mm


光束角

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度



不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	E _{max} (Lx)	Dh(cm)
1.0	0.0052	0.0906	83.79
2.0	0.0013	0.0227	167.58
3.0	0.0006	0.01011	251.37
4.0	0.0003	0.0057	335.19


2W




色温可选



2700K




3000K



4000K

SKY
天际

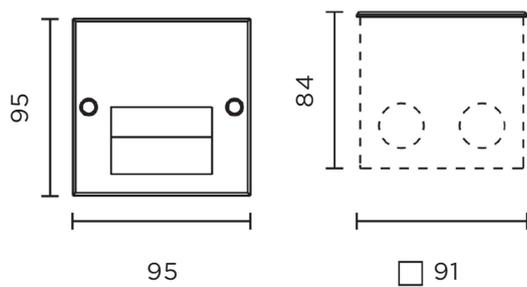

型号
JDB2011

功率
3W


灯体颜色
白色 / 黑色

外观尺寸
95*95*84mm

开孔尺寸
91*91mm


光束角

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度



不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	17	21	69.22
2.0	4	5	138.45
3.0	2	2	207.67
4.0	1	1	276.89


3W




色温可选



2700K




3000K



4000K

SKY
天际

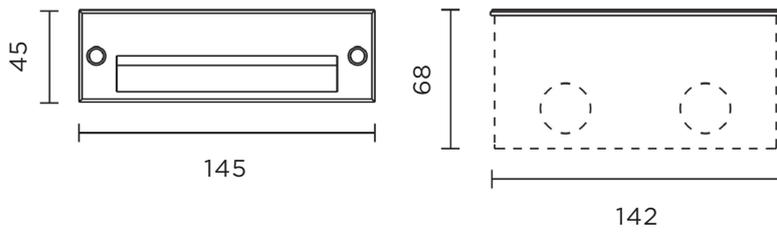

型号
JDB2012


功率
3W

灯体颜色
白色 / 黑色

外观尺寸
145*45*68mm
开孔尺寸
140*40mm


光束角

输入电压
AC 100-265V 50/60Hz







灯体
白色 / 黑色
铝材型



LED 光源
CREE




高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度



不可调光

配光曲线图 (3000K)




H(m)	Eavg(Lx)	Emax(Lx)	Dh(cm)
1.0	25	48	136.48
2.0	6	12	272.96
3.0	3	5	409.44
4.0	2	3	545.92


3W




色温可选




2700K




3000K



4000K

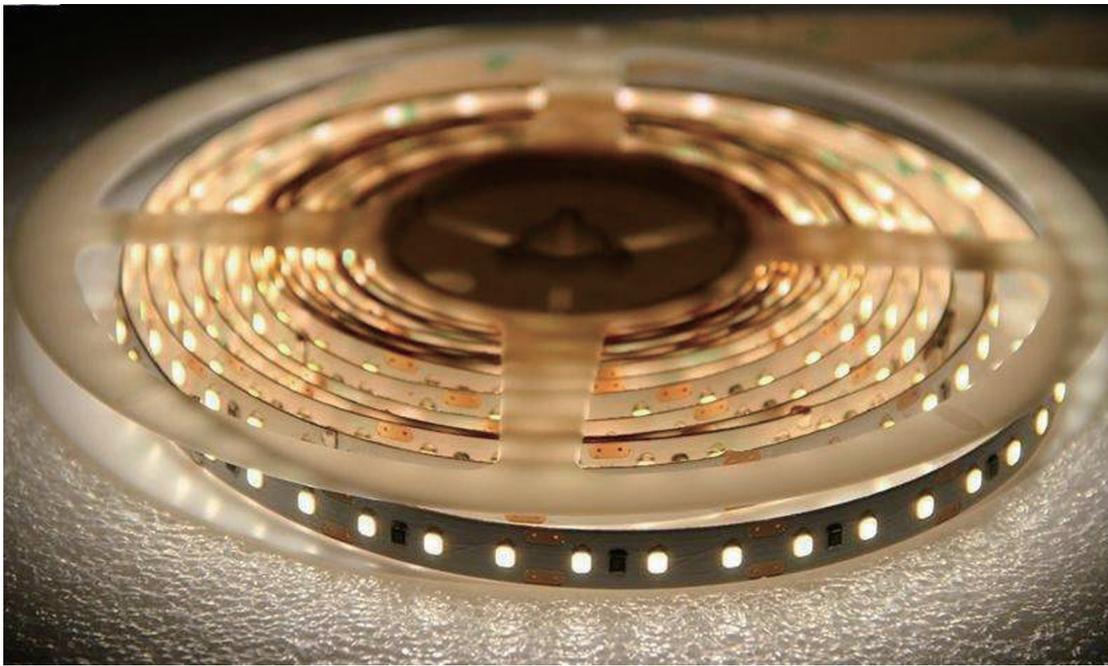

SKY
天际

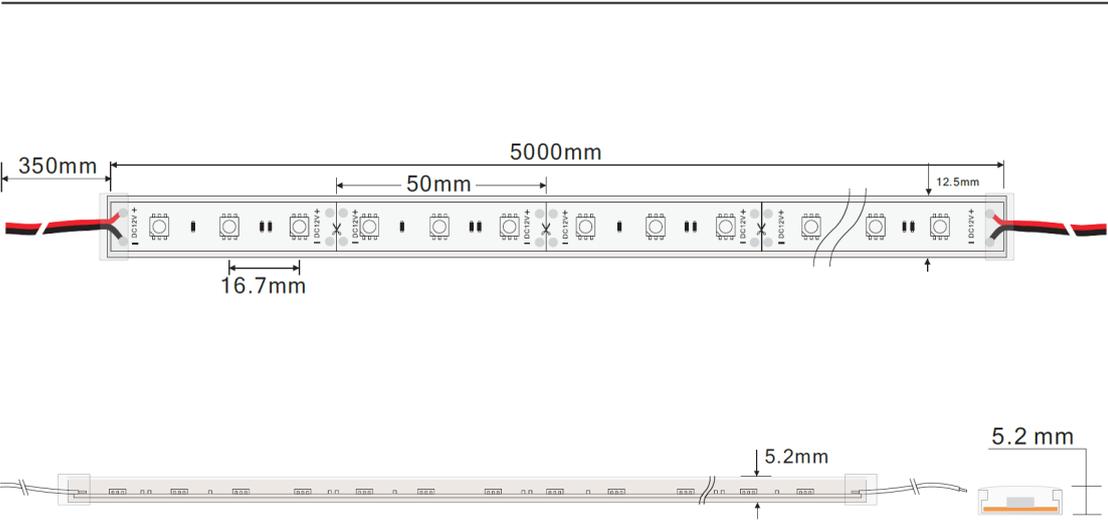

型号
JDD5050-24V-60

功率
6W / 10W / 12W


灯体颜色
白色 / 黑色

外观尺寸
5000*12.5*5.2mm/ 卷

开孔尺寸
无


光束角

输入电压
AC 100-265V 50/60Hz







线路板
LED 贴片



LED 光源




高清晰度
精确配光



高效散热



便捷安装



不同尺寸可选



环保




健康
良好的视觉
舒适度




调光
SCR
DALI
0/1-10V




色温可选



2700K



3000K



4000K